

Euro Tail Light Guard Kit

1. Remove the four Phillips head screws from the tail light lens.




2. Remove the tail light lens cover.

Note: Use caution as the lens may stick to the light housing.



3. Remove the 3 tail light assembly retaining bolts.

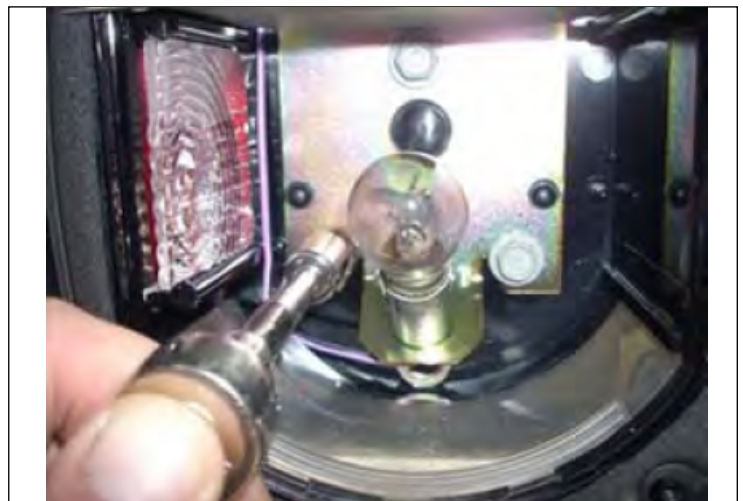



OMIX-ADA, Inc.

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Euro Tail Light Guard Kit

4. Remove the tail light housing from from the body.



5. Carefully pull the tail light wiring through the hole. Guide the connector through the hole.



6. Disconnect the tail light harness from the main harness.





OMIX-ADA, Inc.

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Euro Tail Light Guard Kit

7. Guide the tail light wiring through the new Euro Tail Light Guard.



8. Re-connect the wiring connectors and guide the wiring back into the body.



9. Reinstall the tail light assembly and Euro Tail Light Guard to the original mounting holes using the new bolts provided.





OMIX-ADA, Inc.

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Euro Tail Light Guard Kit

10. Carefully guide the taillight lens back on to the tail light housing.



11. Reinstall the four screws removed in step 1.

Caution: Be careful not to over tighten these screws. Over tightening will crack the lens.

Repeat steps 1-11 for the opposite side.

Check tail light operation. Installation of your New Euro Tail Light Guards is now complete.

