






Part #11226.04 11226.05 11226.06 11226.07

460 HORIZON DR. SUITE 100 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Elite Tail Light Guard PATENT PENDING

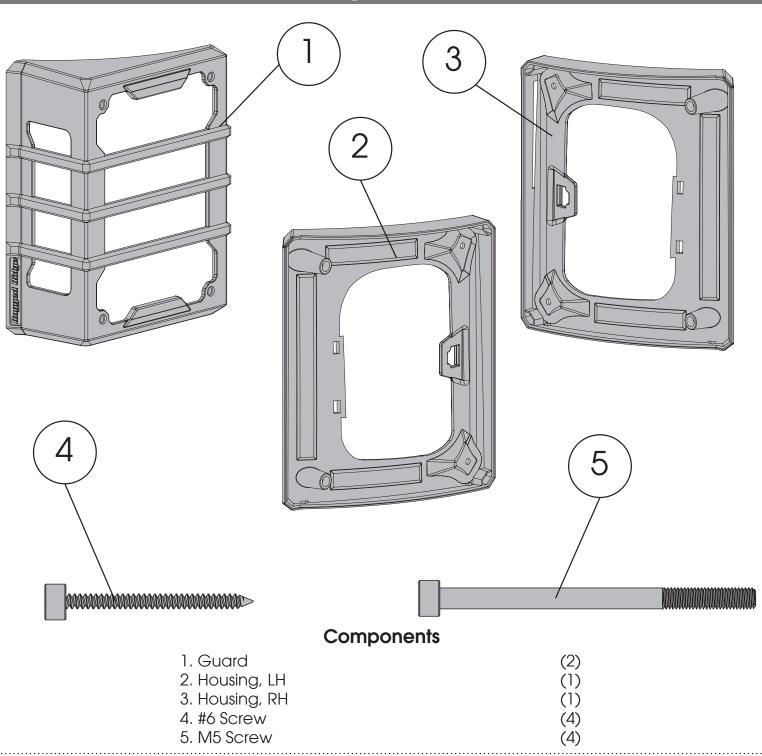

OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8am - 5pm EST 1-800-449-6649 | EMAIL: techsupport@omix-ada.com

FOR WARRANTY INFORMATION VISIT: www.Omix-Ada.com









460 HORIZON DR. SUITE 100 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Elite Tail Light Guard PATENT PENDING

- 1. Remove hardware from tail lights and disconnect from vehicle wiring harness.
- 2. Remove rear trim piece from both tail lights.

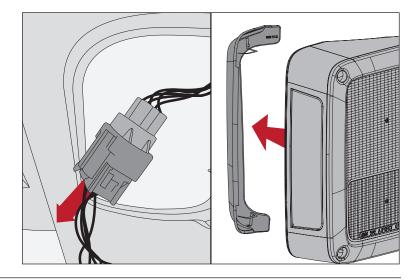

3. Encase tail light inside Housing and Guard using M5 Screws.

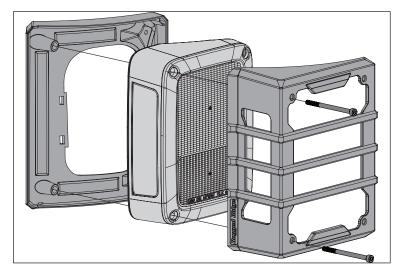

- 4. Reconnect tail light to vehicle wiring harness.
- 5. Secure assembly to vehicle using #6 Screws in remaining attachment points.

