

## Installation instructions

### 2007-08 Jeep® Wrangler JK - Neoprene Rear Seat Covers 4-Door Rear Seats

**Parts included:** (1) Rear (top & bottom) Left Side Seat Cover - Small  
(1) Rear (top & bottom) Right Seat Cover - Large  
(2) Head Rest Covers

**NOTE:** Please read instructions before installing


#### Instructions:

**Step (1)** Release and slightly fold rear seat forward -Driver Side  
For 2008 and newer JK's pull nylon seat release located on the bottom corner of the seat.




Step(1)

**Step (2)** Slip upper seat cover over seat. Note location of head rest slots with Velcro.

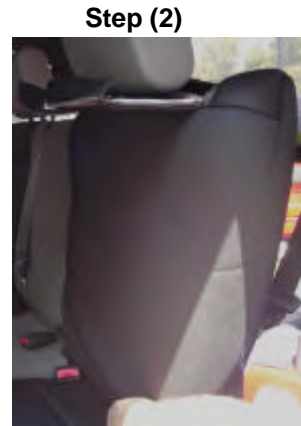


Step (2)

**Step (3)** Slip lower Velcro strip between the upper and lower portions of the seat. and secure.

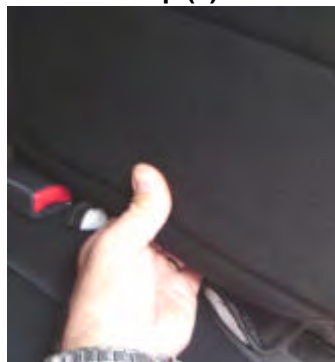

Step (3)

**Step (4)** Secure front and rear Velcro  
As shown. Adjust as needed.

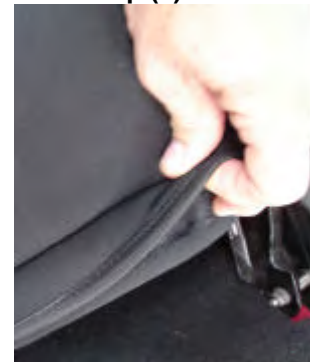

Step (4)

**Step (5)** Pull upper Seat sections through head rest slots.  
**Note: Tilting head rest back will help with install.**  
Secure front & rear Velcro flaps.



Step (5A)



Step (5B)

**Note:** on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (5B)

**Step (6)** Slip smaller lower seat cover into bottom of seat. Push rear of cover (with clips) between top and bottom of seat. Folding seat forward will ease installation.

**Step (7)** With front of cover pulled over seat run nylon straps and clips under seat. Secure to back clips and pull tight.

**NOTE: DO NOT OVER TIGHTEN**  
Damage to seat cover may result.

**Step (8)** Slide side clips between seats and secure to underside of seat.

**Step (9)** Repeat steps 6 - 8 for the right side lower seat.

**Step (10)** Unzip large right side upper cover. Slip around seat as Shown in steps 10A and 10B. Seat belt must be slid through opening before zipping.

**Step (11)** Push lower Velcro flaps between the upper and lower seat and secure together.

**Step (12)** Pull upper Seat sections through head rest slots.  
**Note: Tilting head rest back will help with install.**  
Secure front & rear Velcro flaps.

**Note:** on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (12B)


**Step (13)** Slide covers over head rest as shown.



**Step (6)**



**Step (7)**



**Step (8)**




**Step (10A)**



**Step (10B)**



**Step (11)**



**Step (12A)**



**Step (12B)**

