

# Raptor Series



**Your satisfaction is important to us, please let us help!**

If you have any questions or concerns during the installation, our support representatives are available to assist you.

Please call: 1-877-769-3765 or Live Chat at [www.raptorseries.com](http://www.raptorseries.com)

If you have damaged or missing parts please contact the company you purchased the product from and notify them of the issue right away.



**CAUTION: Do not install damaged parts!!!**

# Raptor Series

## Easy Return / Easy Exchange

---

### **Want to return an item or exchange? Not satisfied with purchase?**

No problem. We strongly believe in service after the sale and we stand behind our products and our service to you, our valued customer. There is no problem we can't solve for you!

Items that have been installed and/or damaged after receipt, are no longer in new and ready-to-sell condition and cannot be refunded, replaced or exchanged unless it has a manufacturer defect or was damaged in shipping. In addition, we cannot accept return on items that are not in the original packaging. Items returned in poor condition or having parts missing will not be credited.

**Please note: Your request for return or replacement must be initiated within 30 days of delivery of your merchandise.**

### **Did your order arrive damaged?**

Please do not install damaged products. Contact the company you purchased your product from as soon as possible and notify them of the damages. They will make arrangements with you to assist with the problem.

### **Did you order the wrong part or receive the wrong item?**

Don't worry. From time to time human error can result in problems with ordering or shipping. Contact the company you purchased your product from as soon as you notice the error. Every company has their own policy on returning parts that have been ordered incorrectly or shipped incorrectly.

In the event that you need to ship your part back to return/exchange, please ship to the warehouse below:

**CYC Returns Warehouse  
2415 Cathy Lane  
Jasper, IN 47546**



## **Raptor Series Warranty**

### **LIMITED TEN (10) YEAR WARRANTY**

#### **For Powder Coated Steel Products**

CYC Engineering, Inc. guarantees the original purchaser of our products a limited ten (10) year warranty from the date of original purchase against manufacturer defects in materials, workmanship and finish under normal use. The step pads are covered under warranty for 1 year. This warranty does not include damage resulting from road hazards such as gravel or other debris, product misuse, improper installation, impairments from accidents, product modifications, product neglect or scratches during the life of the product. This limited ten year warranty applies only to new products and is limited to the repair or replacement of company's products. Warranty does not include costs of removal, installation, labor, inconvenience or consequential damages. Original purchaser must return defective merchandise along with the purchase receipt, to the original place of purchase.

### **LIMITED LIFETIME WARRANTY**


#### **For Stainless Steel Products**

CYC Engineering, Inc. guarantees the original purchaser of our products a limited lifetime warranty from the date of original purchase against manufacturer defects in materials, workmanship and finish under normal use. The step pads are covered under warranty for 1 year. This warranty does not include damage resulting from road hazards such as gravel or other debris, product misuse, improper installation, impairments from accidents, product modifications, product neglect or scratches during the life of the product. This limited lifetime warranty applies only to new products and is limited to the repair or replacement of company's products. Warranty does not include costs of removal, installation, labor, inconvenience or consequential damages. Original purchaser must return defective merchandise along with the purchase receipt, to the original place of purchase.

# 3" ROUND TUBE

# Raptor Series


## Components:



Step Bar -  
Driver Side  
Qty 1



Mount Brace  
Qty 4



Step Bar -  
Passenger Side  
Qty 1



Mounting  
Brackets  
Qty 4

## Hardware:



M8 x 30MM  
Hex Head Bolt  
Qty 16



M10 x 30 mm  
Button Head Bolt  
Qty 8



M8 Lock  
Washer  
Qty 20



M10 Lock  
Washer  
Qty 8



M8 Flat  
Washer  
Qty 20



M10 Flat  
Washer  
Qty 8




M8 Hex Head  
Nut  
Qty 4




Rubber  
Gasket  
Qty 4

## Tools Required:



RATCHET



TORQUE  
WRENCH



14MM SOCKET



6MM HEX BIT

## Torque Specifications:


For Rocker Panel Mount Installations  
M8 through M12 bolts and nuts are set to 15-20 ft lbs.

**Note: When installing the brackets and bars, all hardware must be left loose until all the items are attached.**



**1.** Remove all contents from the package and check stainless steel tubes for any damage. Also, verify that all components and hardware listed above are included before you begin installation.

**2.** Read installation manual and installation drawing completely. Understand all brackets and bolts before installation.




**3.** Begin installation on the passenger's side.

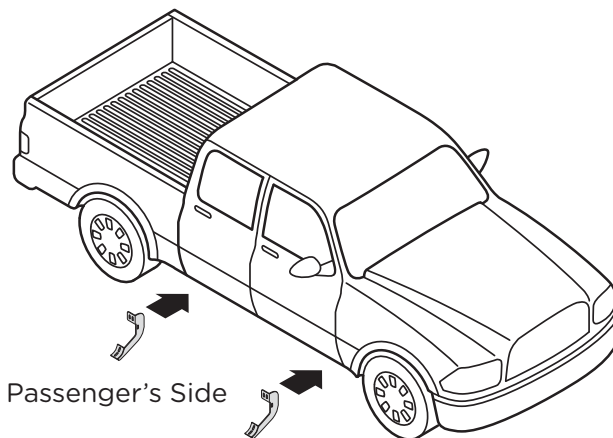

**4.** Align Mounting Brackets with two (2) holes found on the rocker panel (4a) and secure by using two (2) M8 x 30MM Hex Head Bolts, two (2) M8 Lock Washers and two (2) M8 Flat Washers (4b). Repeat this procedure for installation of all Mounting Brackets.

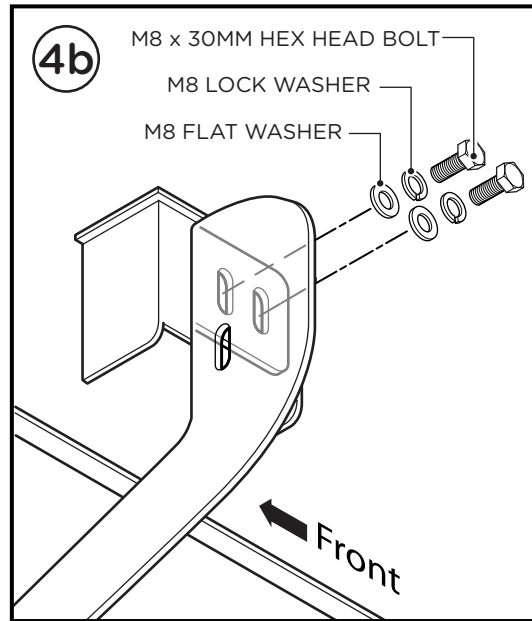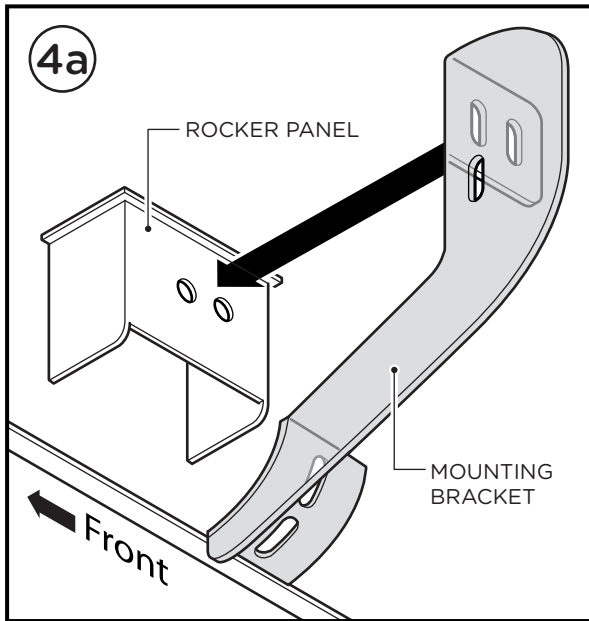

**5.** Align Mount Brace to hole in the rocker panel and fasten using one (1) M8 x 30MM Hex Head Bolt, one (1) M8 Lock Washer and one (1) M8 Flat Washer as shown in (5a) & (5b). Next, fasten the Mount Brace to the Mounting Bracket using one (1) M8 x 30MM Hex Head Bolt, one (1) M8 Lock Washer, (2) M8 Flat Washers and (1) M8 Hex Head Nut as shown in (5c).

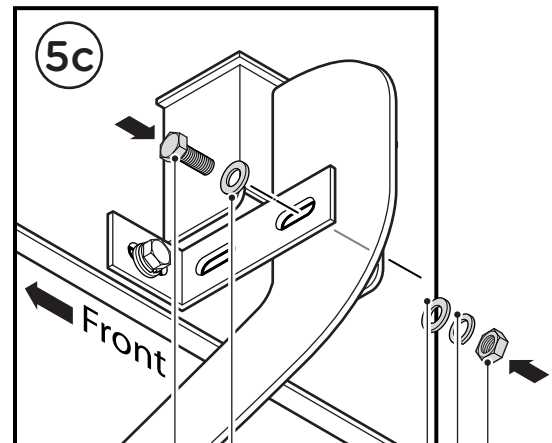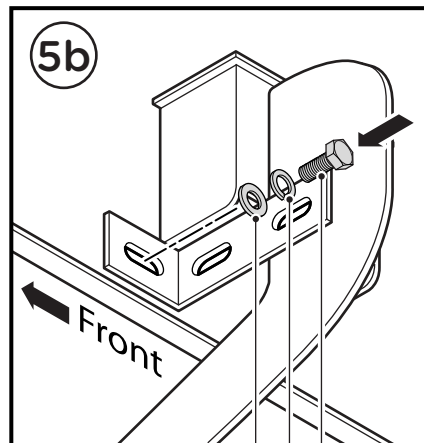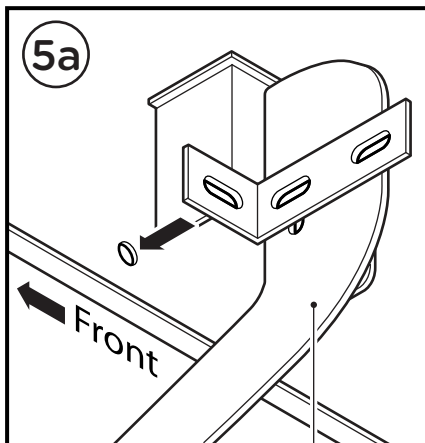

MOUNT  
BRACE

M8 x 30MM  
HEX HEAD BOLT

M8 LOCK  
WASHER

M8 FLAT  
WASHER

M8 FLAT  
WASHER

M8 LOCK  
WASHER

M8 HEX  
HEAD NUT

M8 FLAT  
WASHER

M8 x 30MM  
HEX HEAD BOLT

**6.** Place the Step Bar onto the Mounting Brackets (6a) and attach using two (2) M10 x 30mm Button Head Bolts and two (2) M10 Lock Washers and (2) M10 Flat Washers per bracket (6b).

Repeat these steps for driver side installation. When all hardware is in place, everything must be tightened. See Page 1 for Torque Specifications.

