


Accessories



2009 Trailer Wiring Kit



X 2227A Pulley Block 8,000 lb. (3629kg)
Y 2229A Pulley Block 10,000 lb. (4536kg)



1551 Quick Connect 6 - 10 AWG wire



Accessory Kits

- Kit 1554
- Nylon Carry Bag
 - Heavy Duty Leather Palmed Gloves
 - Pulley Block 10,000 lb (4536kg) (P/N 2229)
 - Nylon Sling (P/N 1509)

* Winch Capacity x 2 = P.B. Capacity



S 2538 Bow Shackles (Pair)
T 2541 Chain With Grab Hooks;
Chain is 3/8" x 10'
(9.5mm x 3.04m)



1560C Roller Fairlead



1559A 2" (50.8mm) Receiver Adapter



- Straps
- 2251 1"x8' tree saver strap
25.4mm x 2.43m)
- 2252 1"x15' recovery strap
25.4mm x 4.57m)

FREEDOM SWITCH™
Wireless Winch Control Systems

- Instant "ON" and "OFF" for immediate control – no delay
- Signal recognition up to 150 feet (45.7m)
- Compact shielded antenna designed for easy remote mounting
- Plug and play components ensure quick installation
- Sealed tough and tight for all conditions
- Fits all Superwinch winches



Wireless Winch Control Kit: P/N 06212
Kit Includes: Power Distribution Module, 2 remote control transmitters, antenna, wiring harness and installation manual.
*FCC Approved



Superwinch, Inc.
Winch Drive
Putnam, Connecticut 06260, USA
Customer Service: 1.860.928.7787
FAX: 1.860.963.0811
e-mail: info@superwinch.com

Superwinch, Ltd.
Abbey Rise, Whitchurch Road
Tavistock, Devon PL19 9DR, England
Customer Service: +44 (0) 1822 614101
FAX: +44 (0) 1822 615204

online
www.superwinch.com

Design, materials and specifications are subject to change without notice. Superwinch is not responsible for printing errors inadvertently made in the production of this catalog.

GENERAL PURPOSE
UTILITY WINCHES




POWER WHEN YOU NEED IT,
WHERE YOU NEED IT.


New GP Series

Mighty. Only Superwinch offers big winch features in a family of winches with capacities of 3,000 (1360kg) pounds and less... introducing the NEW Superwinch GP Series of General Purpose Utility winches! GP Series winches may be compact, but they're loaded with big winch functions such as power IN and OUT, mechanical and dynamic braking, free-spooling drum, a rugged 15 foot (4.6m) hand-held remote, pre-mounted sealed switching solenoid, and 60 feet (18.3m) of aircraft wire rope (50' (15.2m) GP3000). The new Superwinch GP Series dependably tackles all your utility applications.

GP1800, GP2300, and GP3000 Dimensions

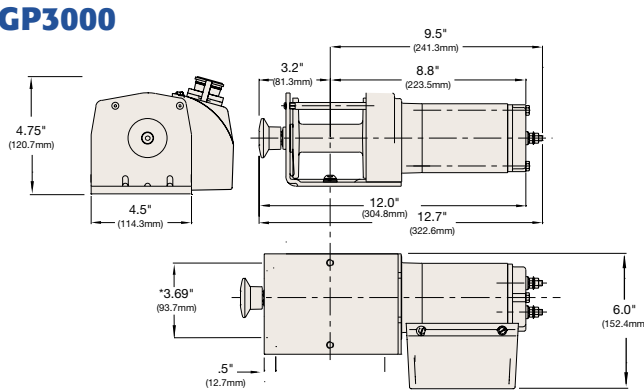

GP1800/GP2300

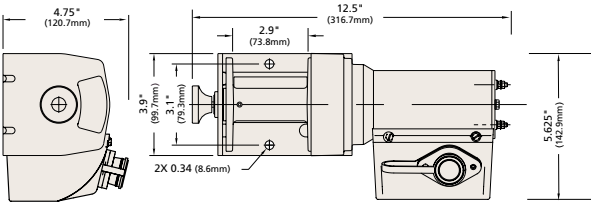

GP1800, GP2300, and GP3000 Series Winches

GP1800, GP2300, and GP3000 Product Specifications

	GP1800	GP2300	GP3000
Rated Line Pull	1,800 lb. (816 kg)	2,300 lb. (1043 kg)	3,000 lb. (1360 kg)
Motor	0.71 hp (0.5kW)	0.71 hp (0.5kW)	1.1 hp (0.8kW)
Gearing	Differential Planetary	Differential Planetary	Differential Planetary
Gear Ratio	153:1	153:1	153:1
Braking	Dynamic and Mechanical	Dynamic and Mechanical	Dynamic and Mechanical
Remote Control	15' (4.5m) Handheld	15' (4.5m) Handheld	15' (4.5m) Handheld
Wire Rope	5/32" x 60' (4mm x 18.2mm)	5/32" x 60' (4mm x 18.2mm)	3/16" x 50' (4.8mm x 15.2mm)
Dimensions	12.5"l. x 3.9"d. x 4.1"h. (318mm x 99mm x 104mm)	12.5"l. x 3.9"d. x 4.1"h. (318mm x 99mm x 104mm)	12.7"l. x 4.36"d. x 4.5"h. (323mm x 111mm x 114mm)
Drum Diameter	1.25" (32mm)	1.25" (32mm)	1.25" (32mm)
Drum Length	2.9" (74mm)	2.9" (74mm)	2.9" (74mm)
Weight	13 lb. (5.9 kg)	14 lb. (6.4 kg)	15 lb. (6.8 kg)

All ratings are for first (bottom) layer of wire rope.

Winch selection guide for car and boat trailers

UTILITY TRAILERS/ROLLING WEIGHT

Model	20% Grade*	40%	60%	80%
GP1800	5,100	3,233	2,496	2,134 lbs.
GP2300	6,803	6,347	2,816	2,407 lbs.
GP3000	8,503	5,388	4,160	3,556 lbs.

* A 10% grade is a rise of one foot in ten feet.

* Winches are not intended as a load securing device.

BOAT TRAILERS

Model	Boat Length	Weight Lbs./Kg
GP1800	Outboards to 17' (5.2 m)	2,500 (1,134)
GP2300	Outboards to 18' (5.5 m)	3,500 (1,588)
GP3000	Outboards, I/O's to 22' (6.7 m)	6,000 (2,722)

* Winches are not intended as a load securing device.

All ratings are for first (bottom) layer of wire rope.

⚠ Winches are not intended for the transportation of people.

Consider A Pulley Block

With a hook for mounting and a pulley for the wire rope, a pulley block lets you offset the winch but retain a straight shot. A pulley block can also be used to nearly double the winch's capacity by simply attaching the pulley block's hook directly to the load and the winch's hook to a sturdy mount near the winch.

P/N 1323200



P/N 1318200



P/N 1330200

PERFORMANCE 12VDC (1st layer on drum) GP1800

Line Pull lbs./kg	Line Speed FPM (m/m)	Motor12V Amps
0	27.0 (8.2)	8
500 (227)	11.3 (3.4)	30
1,000 (454)	8.5 (2.6)	60
1,500 (680)	5.2 (1.6)	90
1,800 (816)	3.3 (1.0)	108

GP2300

0	27.0 (8.2)	8
500 (227)	11.3 (3.4)	30
1,000 (454)	8.5 (2.6)	60
1,500 (680)	5.2 (1.6)	90
1,800 (816)	3.3 (1.0)	108
2,300 (1043)	2.2 (0.6)	140

GP3000

0	26.9 (8.2)	20
500 (227)	12.0 (3.6)	30
1,000 (454)	10.0 (3.0)	55
1,500 (680)	5.2 (1.6)	90
1,800 (816)	7.0 (2.1)	87
2,300 (1043)	6.0 (1.8)	105
2,500 (1133)	5.0 (1.5)	120
3,000 (1360)	3.0 (0.9)	140

