




**13128****LAND ROVER RANGE ROVER EVOQUE**

8/13/2020

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 4,000 LBS. TRAILER WEIGHT &amp; 600 LBS. TONGUE WEIGHT.

**\*\*\*DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.\*\*\*****WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY 18050 STABILIZING STRAPS.****\*\* FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY\*\*****HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-877-287-8634**

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	10-10515	HHCS,M14x2,110,CL10.9,YZ
2	1	30-00164	WASHER,S-CON,9/16,YZ
3	1	10-10272	BOLT,CAR,1/2-13 UNC,1-3/4,GRD8,YZ
4	1	CM-SP6	.250 x 1.00 x 3.00" SQUARE HOLE SPACER
5	1	30-00149	WASHER,S-CON,1/2,YZ
6	1	20-00171	NUT,HEX,1/2-13 UNC,GRD8,YZ
7	3	10-10516	FB,M12x1.75,35,CL10.9,YZ
8	1	1_2 FISHWIRE	1/2" FISHWIRE

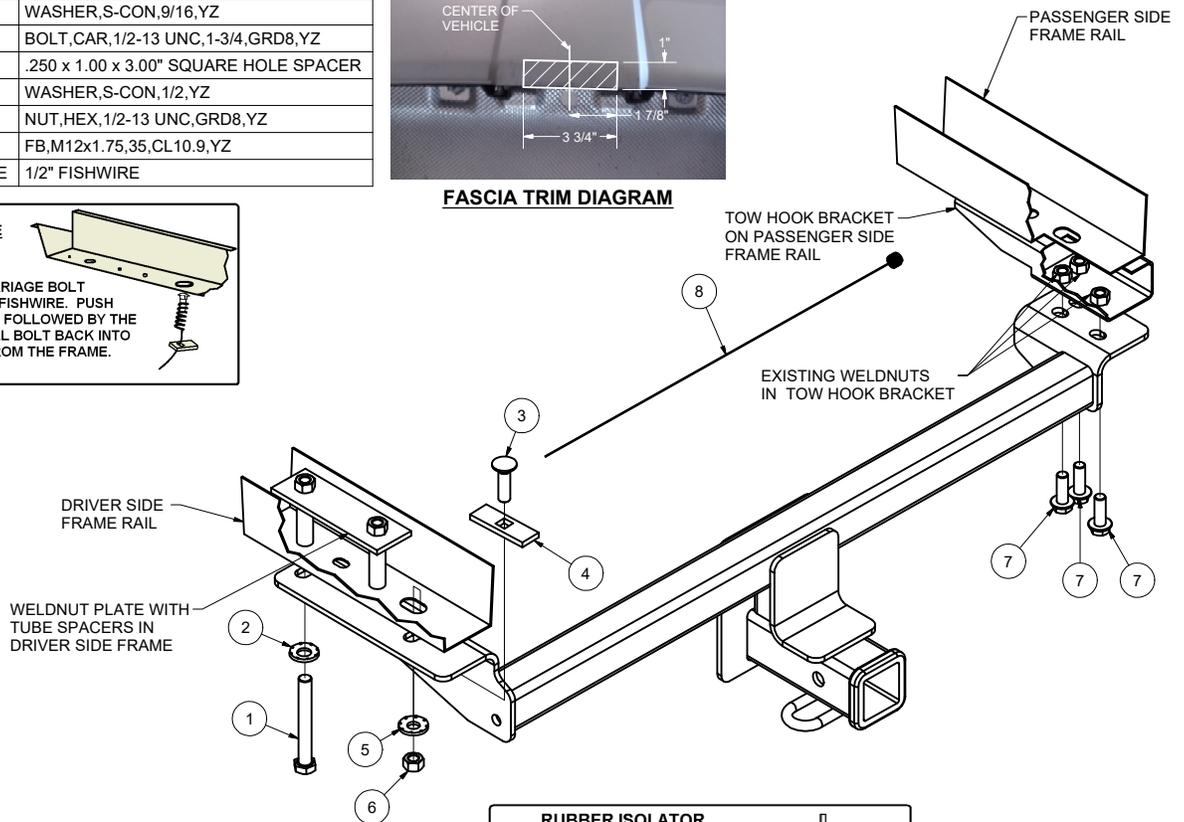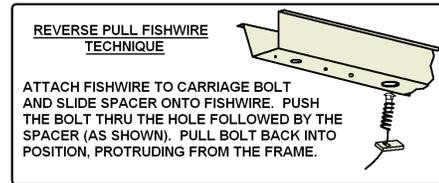**FASCIA TRIM DIAGRAM**

HITCH WEIGHT: 30 LBS.

**INSTALL TIME**

PROFESSIONAL: 30 MINUTES

NOVICE (DIY): 65 MINUTES

**INSTALL NOTES:**

- NO DRILLING REQUIRED
- REVERSE FISHWIRE HARDWARE
- LOWER EXHAUST
- REMOVE OR TRIM HEAT SHIELD
- FASCIA TRIMMING REQUIRED

**TOOLS REQUIRED**

TORQUE WRENCH

RATCHET

PRY BAR

TAPE MEASURE

CUT OFF WHEEL

TIN SNIPS

10mm, 15mm, 22mm SOCKETS

3/4" SOCKET


T-30 TORX BIT

**RUBBER ISOLATOR REMOVAL DIAGRAM**

This technique can be used if an Exhaust Hanger Removal Pliers is not available.

Using a 5/8" open end wrench, slide the wrench up to the rubber isolator, cradling the hanger rod as shown. Next place the flat edge of a pry bar between the wrench and the hanger stop or hanger rod. Then simply rotate the pry bar toward the wrench to remove the rubber isolator.

Note: Using a spray lubricant or soapy water on the hanger rod and the rubber isolator helps removal.



**FRONT**  
**REAR**

**INSTALLATION STEPS**

1. Lower exhaust by removing bolt which attaches exhaust hanger bracket on passenger side frame rail, then disconnecting 2 rubber isolators. Support exhaust to prevent it from being damaged.
2. Remove rear heat shield at vehicle fascia by removing 4 hex bolts and 8 Torx bolts. Heat shield may either be trimmed and reinstalled or permanently removed.
3. Reverse fishwire 1/2" carriage bolt and spacer up through slot in driver side frame rail and back down through slot.
4. Trim fascia as shown, approximately 3 3/4" long X 1" wide (See Fascia Trim Diagram).
5. Raise hitch into position, being careful not to push 1/2" carriage bolt back into frame.
6. Install remaining fasteners as shown. Torque all 1/2" fasteners to 110 ft-lbs, torque all M12 fasteners to 79 ft-lbs, torque all M14 fasteners to 126 ft-lbs.
7. Raise exhaust back into position.

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

Curt Manufacturing LLC., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing LLC., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing LLC.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.

YEARS: 2012-PRESENT

MAKE: LAND ROVER

MODEL: RANGE ROVER EVOQUE

STYLE: CROSSOVER

**WARNING: NEVER EXCEED YOUR VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY**

**WEIGHT CARRYING:**  
 TRAILER WEIGHT: 4,000 LBS.  
 TONGUE WEIGHT: 600 LBS.

**WARNING:**  
 WE RECOMMEND THE USE OF 18050 STABILIZING STRAPS FOR ALL NON-TRAILER (WHEEL-LESS) LOADS. PLEASE SEE THE CURT CATALOG OR VISIT US ONLINE AT [WWW.CURTMFG.COM](http://WWW.CURTMFG.COM) FOR FURTHER INFORMATION.

**INSTALLATION TIME: 30 MIN.**

THE INSTALL TIME LISTED IS FOR PROFESSIONAL INSTALLERS. IF YOU ARE HESITANT TO UNDERTAKE THIS TASK ON YOUR OWN, CONTACT AN AUTHORIZED CURT INSTALLER FOR ADDITIONAL ASSISTANCE.

**INSTALLATION TIPS:**

- BEFORE YOU BEGIN INSTALLATION, READ ALL INSTRUCTIONS THOROUGHLY.
- TO EASE INSTALLATION, 2 PEOPLE MAY BE REQUIRED.
- USING PROPER TOOLS WILL GREATLY IMPROVE THE QUALITY OF THE INSTALL AND REDUCE THE TIME REQUIRED.
- NEED HELP OR HAVE SOME QUESTIONS? CALL TECHNICAL SUPPORT AT 877.287.8634




**INSTALLATION REQUIRES:**

<b>AVIATION SHEARS</b>	<b>CUT-OFF WHEEL</b>	<b>TORQUE WRENCH</b>
<b>MASKING TAPE</b>	<b>PRY BAR</b>	<b>RATCHET</b>
<b>SAFETY GLASSES</b>	<b>10mm 15mm 22mm 3/4" SOCKET</b>	<b>T-30 TORXBIT SOCKET</b>
<b>TAPE MEASURE</b>		

**LEVEL OF DIFFICULTY: MODERATE**

EASY	MODERATE	CHALLENGING
	REVERSE FISHWIRE FASTENERS	
	TEMPORARILY LOWER EXHAUST	
	NO DRILLING REQUIRED	
	FASCIA TRIMMING REQUIRED	
	HEAT SHIELD REMOVAL <u>OR</u> TRIMMING REQUIRED	

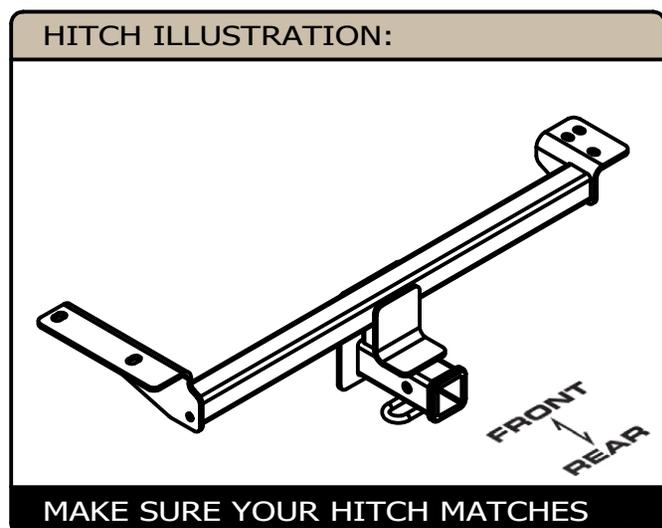


**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE ALL FASTENERS ARE TIGHT AND ALL STRUCTURAL COMPONENTS ARE SOUND**

CURT Manufacturing LLC. warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing LLC. may repair or replace the product at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing LLC.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.

For more information log onto [www.curtmfg.com](http://www.curtmfg.com), & for helpful towing tips log onto [www.hitchinfo.com](http://www.hitchinfo.com)

# INSTALLATION WALKTHROUGH:

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	10-10515	HHCS,M14x2,110,CL10.9,YZ
2	1	30-00164	WASHER,S-CON,9/16,YZ
3	1	10-10272	BOLT,CAR,1/2-13 UNC,1-3/4,GRD8,YZ
4	1	CM-SP6	.250 x 1.00 x 3.00" SQUARE HOLE SPACER
5	1	30-00149	WASHER,S-CON,1/2,YZ
6	1	20-00171	NUT,HEX,1/2-13 UNC,GRD8,YZ
7	3	10-10516	FB,M12x1.75,35,CL10.9,YZ
8	1	1_2 FISHWIRE	1/2" FISHWIRE

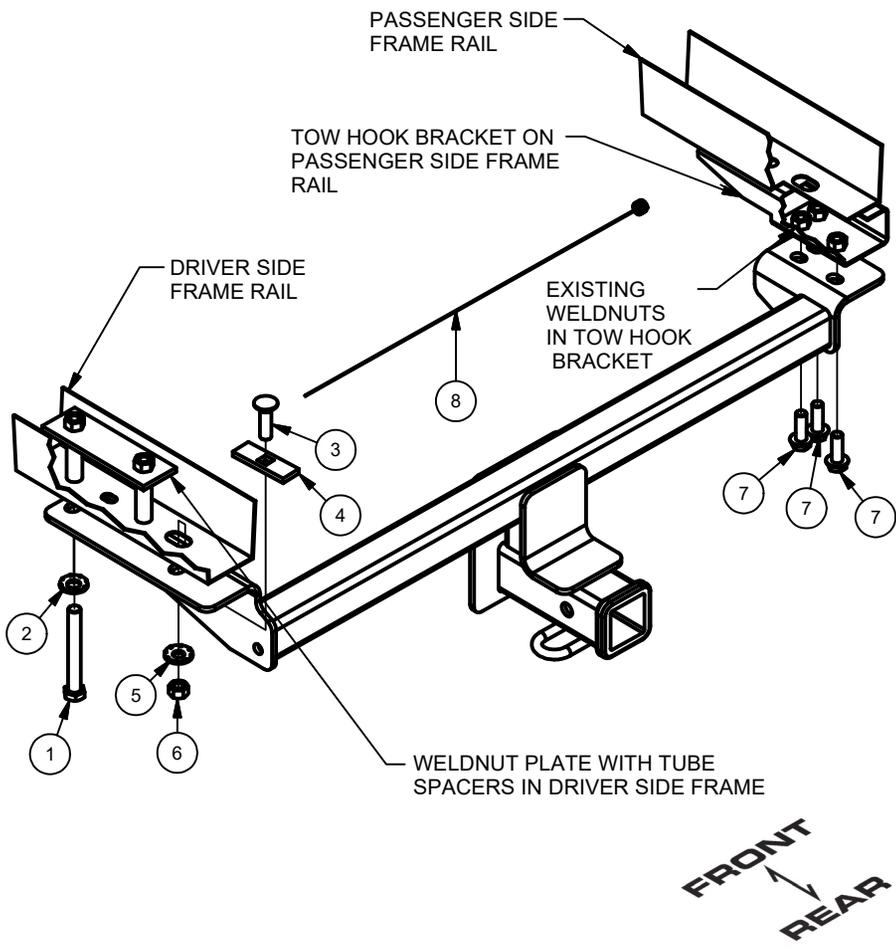

1. Lower exhaust by removing bolt which attaches exhaust hanger bracket on passenger side frame rail, then disconnecting 2 rubber isolators. Support exhaust to prevent it from being damaged.



2. Remove rear heat shield at vehicle fascia by removing 4 hex bolts and 8 Torx bolts. Heat shield may either be trimmed and reinstalled or permanently removed.




## INSTALLATION WALKTHROUGH:


- Reverse fishwire 1/2" carriage bolt and spacer up through slot in driver side frame rail and back down through slot.



- Trim fascia as shown, approximately 3 3/4" long x 1" wide (See Fascia Trim Diagram).

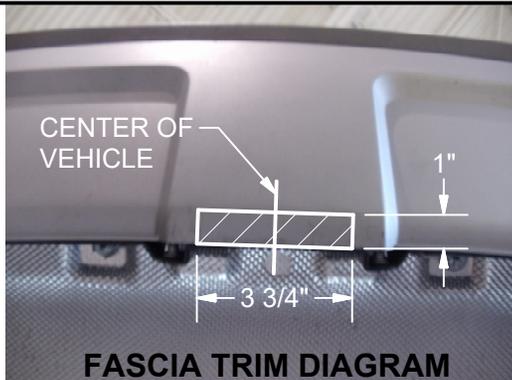

- Raise hitch into position, being careful not to push 1/2" carriage bolt back into frame.
- Install remaining fasteners as shown. Torque all 1/2" fasteners to 110 ft-lbs, torque all M12 fasteners to 79 ft-lbs, torque all M14 fasteners to 126 ft-lbs.

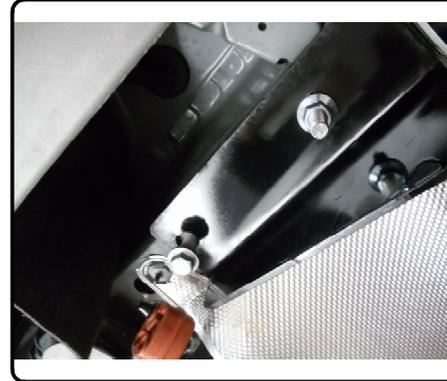

- Raise exhaust back into position.
- Installation is complete

