


WIRING

- To Chassis Ground ----- ① **BLACK**
- To +VCD(fuse @ 2A) ----- ⑤ **RED**
- Pin is empty ----- ④ **GREY**
- For Synchronization ----- ③ **WHITE**
 - Connect WHITE wires of all light heads together for synchronization.
- For Pattern Selection --- ② **YELLOW**
 - Connect YELLOW wire to ground for Flash Pattern Selection:
 - Less than one second to next pattern
 - 1-3 seconds to previous pattern
 - More than 5 seconds to turn off the lights
 - Save and exit setting mode by disconnecting all power.

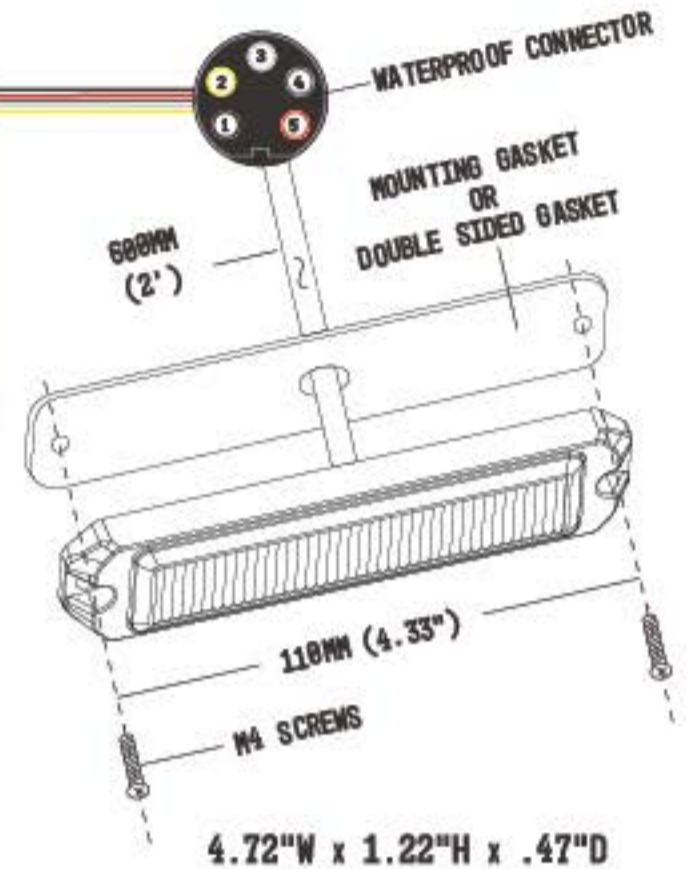

INSTALLATION

Two mounting options available.

1. Double sided 3M VHB tape provided for direct tape mount.
2. Both self-tapping & round head screws are provided for screw mount.

FLASH PATTERNS:

1.	Single Flash	14.	Triple Flash - Alternate
2.	Single Flash - Slow	15.	Quad Flash - Alternate
3.	Double Flash	16.	Octa Flash - Fast - Alternate
4.	Double Flash - Slow	17.	Single Flash - Split
5.	Triple Flash	18.	Double Flash - Split
6.	Quint Flash - Fast	19.	Quad Flash - Split
7.	Quint Flash - Slow	20.	Octa Flash - Split
8.	Octa Flash - Fast	21.	Single Flash - Split accelerate
9.	Octa Flash - Slow	22.	Double Flash - Split accelerate
10.	Twelve Flash	23.	SOS Flash
11.	Sixteen Flash	24.	Cycle(1,8,3,9,4,18)
12.	Single Flash - Alternate	25.	Cycle(2,7,9,11,19,21)
13.	Double Flash - Alternate	26.	Steady on