





## INSTALLATION INSTRUCTIONS FOR SPARE SHIELD TSS10JW FOR JEEP WRANGLER (1996-2017) WITHOUT BACK UP CAMERA




EE

1. STOP! PLEASE CONSULT YOUR VEHICLE'S OWNER'S MANUAL FOR INSTRUCTIONS ON HOW TO REMOVE THE SPARE TIRE.
2. REMOVE THE SPARE TIRE. (SEE PIC A)
3. INSTALL THE SPARE SHIELD JEEP WRANGLER LOCK PLATE WITH SLOTTED TAB OVER THE STUDS. (SEE PIC B)
4. PUSH THE 3 WASHERS PROVIDED OVER EACH OF THE 3 STUDS UNTIL THEY ARE SECURE & CANNOT BE REMOVED. (SEE PIC B)
5. REINSTALL THE SPARE TIRE. (SEE PIC C)
6. INSTALL RUBBER DISC AND ROUND STEEL PLATE WITH RUBBER FACING THE RIM. (SEE PIC D & F FOR PROPER INSTALLATION SEQUENCE)
7. INSTALL LOCK WITH SMOOTH SOLID BLACK SIDE FACING AWAY FROM THE VEHICLE (SEE PIC E & EE MAKING SURE YOU CANNOT SEE THE 3 PINS) THEN REMOVE THE KEY, PLACING ONE KEY ON YOUR KEY RING AND THE OTHER IN YOUR GLOVE COMPARTMENT.

A

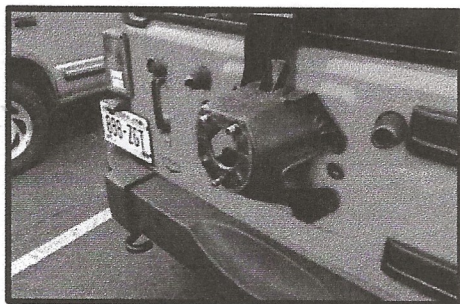

B

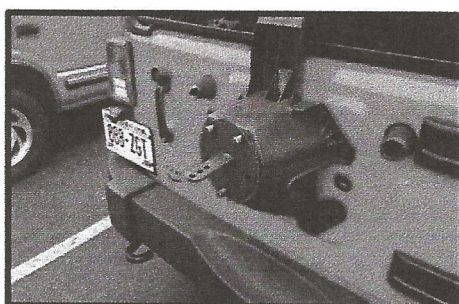

C



D



E



F

