



Components and Hardware

1.


2.


3.


4.


5.



Components and Hardware:

1.

Hood Shield.....

[1]
2.

Self tapping screw (long).....

[4]
3.

Self tapping screw (short)

[2]
4.

Aluminum Flat Washer

[6]
5.

Bump On.....

[4]

Tools for Installation:


- Car Wash Supplies
- Clean Towel
- Phillips Screwdriver

Hood Shield


Preparation Before Installation:

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.


NOTE: Ensure vehicle surface and part are between 60°F and 80°F (15°C and 27°C) prior to installation.



Do not drive vehicle for 24 hours after installation.

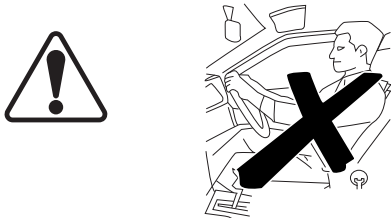


Do not wash vehicle for 72 hours after installation.

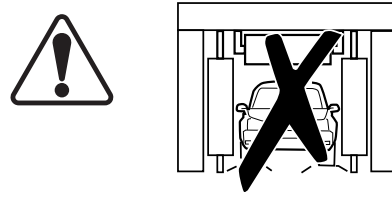


Hood Shield

Installation Procedure:

- 1 Open hood.

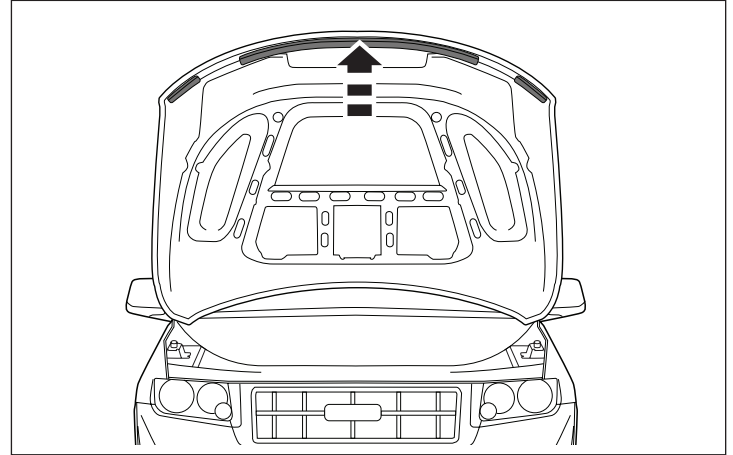


- 2 Carefully separate the hood seal / gasket from the areas of the hood that align with the hood shield tabs, and remove (6) plastic seal retaining fasteners that align with the pre-drilled holes and tabs in the hood shield.

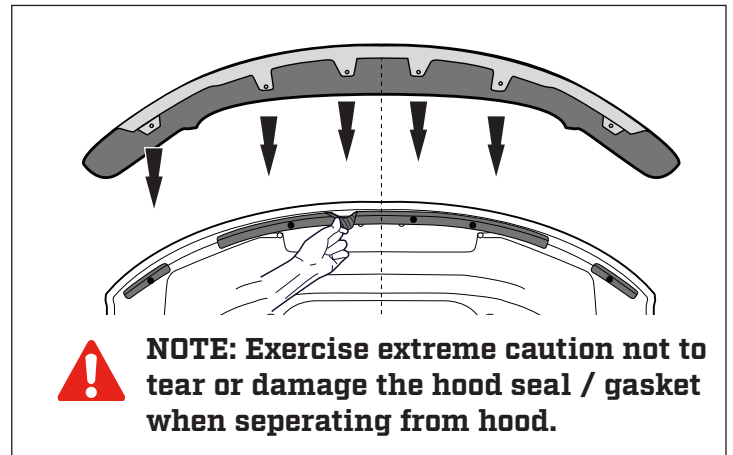


NOTE: Exercise extreme caution not to tear or damage the hood seal / gasket when separating from hood.

- 3 Reposition the hood shield with the tabs sliding **BETWEEN** the hood and rubber seal and align with holes.


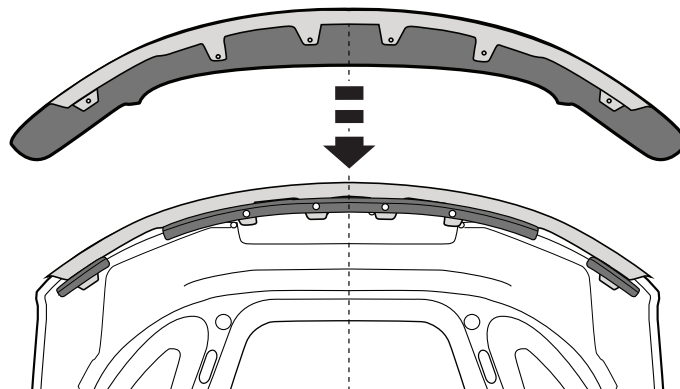


Hood Shield

- 4 Locate the [4] **INBOARD** flanges.

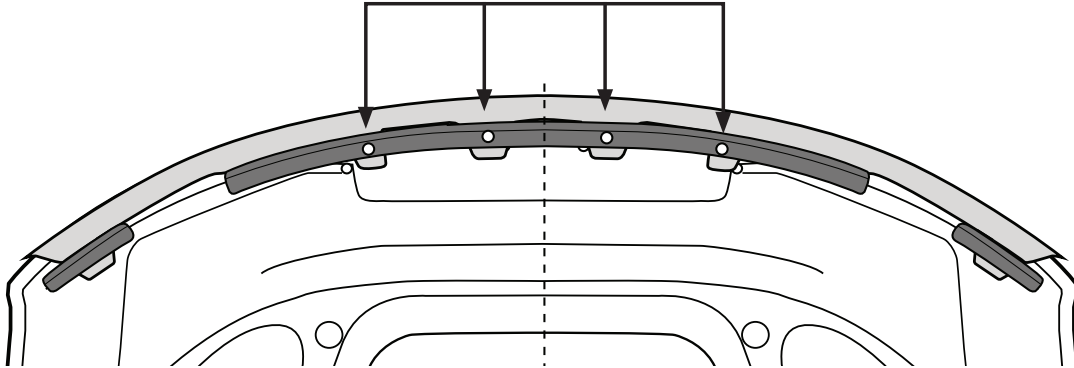


- 5 Insert [4] of the long self tapping screws and washers through the rubber gasket, hood shield, and into the hood. Securely tighten.

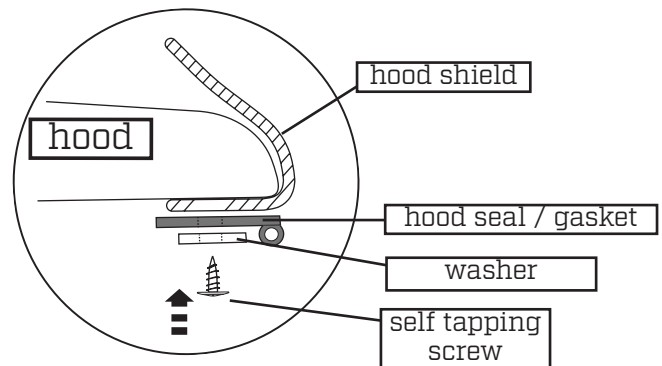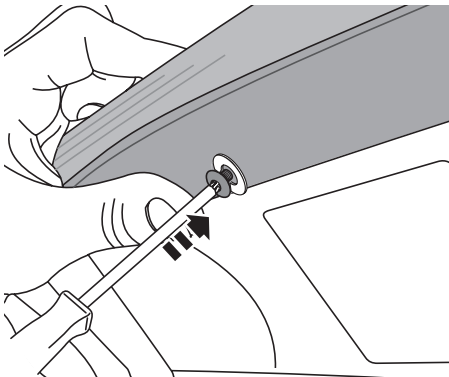

DO NOT OVER TIGHTEN



- 6 Locate the [2] **OUTBOARD** flanges.

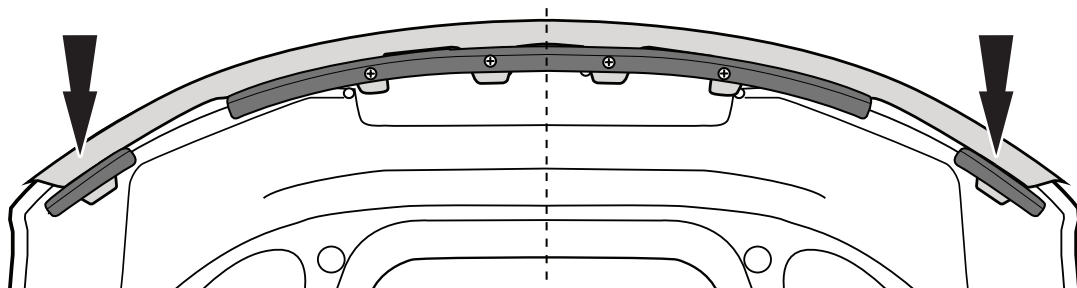

Hood Shield


7

Insert (2) short screws and washers through the hood shield and into the hood. Securely tighten.

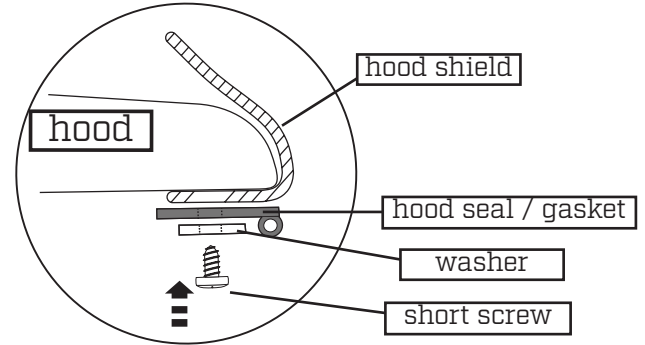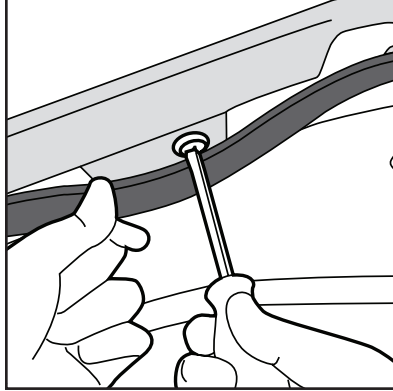**DO NOT OVER TIGHTEN**


8

Turn both of the hood bumpers counter clockwise 1 1/2 turns.

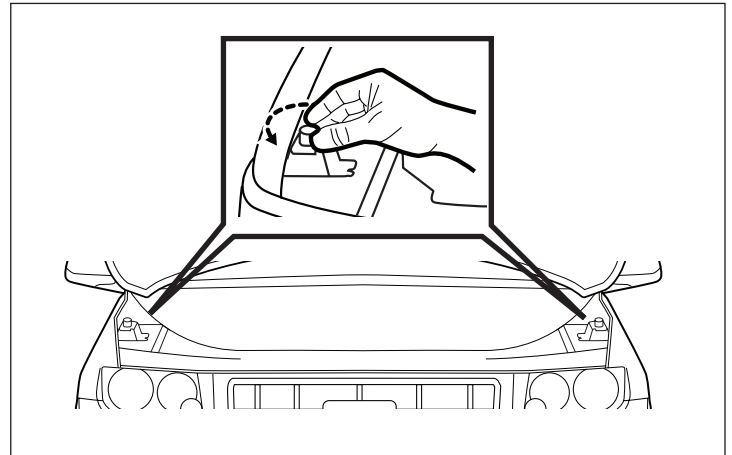


9

Close Hood.

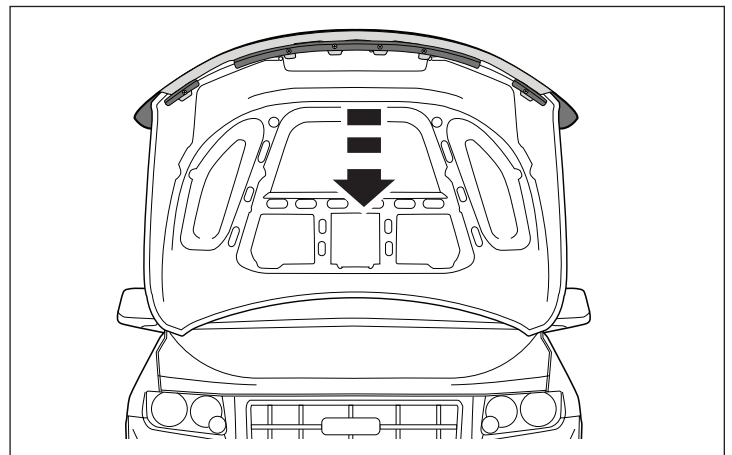

Hood Shield

- 10 Apply [4] bump ons to surface of hood.

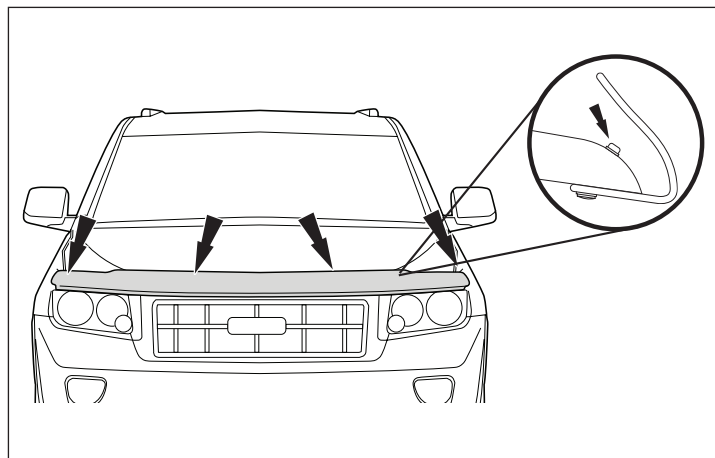

Care and Cleaning

- Wash only with mild soap & dry with a clean cloth.



The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.

Congratulations!

We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

www.huskyliners.com

Phone: 800-344-8759

Email: customerservice@huskyliners.com

