

PUTCO®

ADVANCED LED LIGHTING & TRUCK ACCESSORIES

FORD CHASE STINGER BRACKET ASSEMBLY



For proper installation and best possible fit, please read all instructions BEFORE you begin.

Important Information

BEFORE you begin the installation process:

- Carefully read all instructions.
- Verify that all parts are included by checking the contents of your kit.

If any parts are missing or appear damaged, please contact our customer service team for assistance.

Customer Service

For support, please contact the Putco team, available Monday to Friday 8:30 AM to 5PM (Central Time).

1 800 247 3974

support@putco.com

Supported Vehicles

MAKE	MODEL	YEAR
FORD	MAVERICK	2022-2025
FORD	RANGER	2019-2025
FORD	F-250	2017-2025
FORD	F-150	2015-2025

Recommended Tools + Supplies

T15 Torx Driver

Kit Contents


Chase Stinger Bracket Assembly

Step by Step Installation


1. Using a T15 torx driver remove the 4 bolts that are securing the existing 3rd brake light. Set them aside as they will be re-used.




2. Pull the light fixture slightly away from the truck, exposing the bulbs and wires.

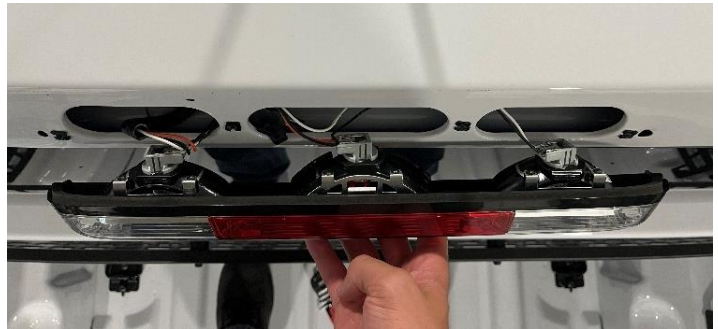

3. Twist the bulbs 1/4 of a turn to detach the bulbs from the lighting cover. Set aside the lighting cover as it will be re-used.

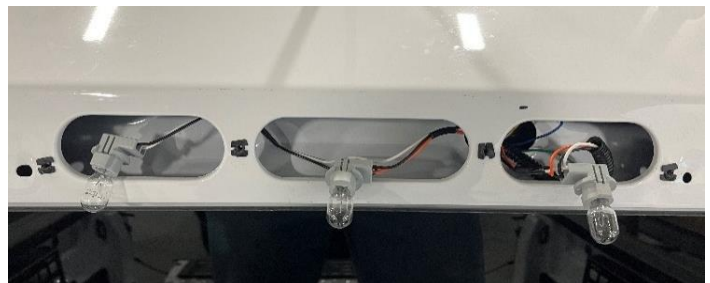

4. Using the piece of foam gasket, peel the white release liner off the gasket and stick all the way around the back of the bracket. Starting at the bottom middle and leave a $\frac{1}{2}$ " gap.

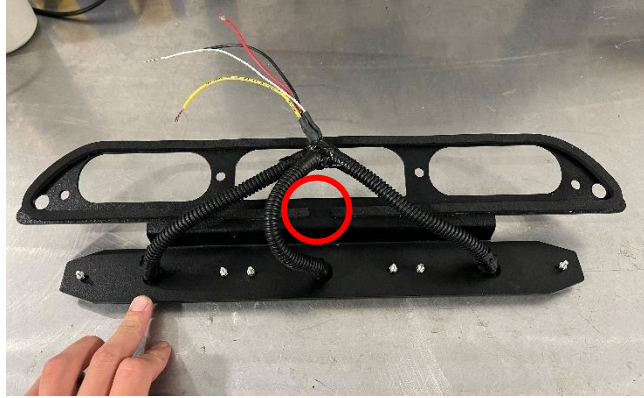

5. Place the lighting cover over the Chase Stinger Bracket. Screw the blubs $\frac{1}{4}$ of a turn back into the lighting cover.
6. Wire according to your preference utilizing the pigtail wires.



7. Using the existing hardware and holes, bolt the bracket to the truck.
8. Make sure the foam gasket is pressed tightly against the truck ensuring there are no gaps.



Congratulations on completing the installation of your Putco product!
For information regarding your warranty, please visit www.putco.com/warranty.

Issues? Please Contact Our Technical Support Team: 1 800 247 3974



WARNING: Final Inspection required. Inspect product was properly Installed and all installation instructions were followed.



For additional information, please visit our website at www.putco.com!

INSTRUCTIONS FOR STINGER WIRING BELOW



4" Stinger Lighthouse - Installation Instructions

Congratulations on your purchase of a high quality PUTCO product. Should you need any application or technical assistance, feel free to call us at: 1-800-247-3974 Monday-Friday 8:00 a.m. - 5:00 p.m. (Central Standard Time)
Contact your PUTCO dealer for other quality accessories.

Please read all instructions before installation and to check to see that all parts are included.

KIT CONTENTS

Description	Quantity
4" Stinger Lighthouse	1
Self-Tapping Screws	2
Foam Gasket	1

4" Stinger Light head Installation

1. Verify the kit contents above.
2. Clean and dry the vehicle thoroughly in location where the Stinger will be installed.
3. After the location is cleaned, test fit the Stinger in that location.
4. After identifying the fitment, use the supplied self-tapping and secure the Stinger to the vehicle, ensuring that the foam gasket is properly placed behind the Stinger.

4" Stinger Lighthouse Wiring Diagram

Wire Color	Functions
Red	12V+
Black	Ground
White	Color Changing (tap to ground)
Yellow	Pattern Changing (tap to ground)
Blue	Troubleshoot wire – NOT required / Do not wire.

How to Change Pattern and Speed

1. Connect Red wire to 12V+
2. Connect Black wire to ground
3. While the Stinger is on, tap the White wire to ground to get to your desired color(s)
4. Now that you have chosen your color(s), tap the Yellow wire to ground in order to change the pattern & speed of the desired color(s).
5. You're all set, the Stinger will memorize the last pattern that was used and can be turned on/off as you desire.

SYNC:

If you are wiring multiple Stingers and you need them to reset to the same pattern/sequence, simply wire all the stinger yellow wires together and tap/hold ground (-) for 5 seconds. This will reset the pattern, then you can select the desired pattern by continuing to tap ground.



PUTCO®

NOTE: This product is intended for commercial use only. Putco is not responsible or liable for any legal issues resulting in the use of this product beyond its commercial intent.