



Rugged Ridge Locking console 13102.XX Installation Instructions 1976-1995 CJ & Wrangler

<u>Included Components</u>	<u>Quantity</u>	<u>Required Tools for Installation</u>
1. Console	(1)	1. Electric Drill
2. Mounting Bracket	(1)	2. 1/8" Drill Bit
3. 14 X 1 3/4" Screw	(3)	3. 3/16" Drill Bit
4. 8 X 3/4" Screw	(4)	4. Phillips Screw Driver

Important Information - 13101.XX console used for reference only.
Installation steps are the same for 13102.XX

- Please refer to **Section 1** on pages 1 -3, for the Jeep® CJ-7 and Wrangler **ONLY**.
- Please refer to **Section 2** on Page 4, for the 1976-83 Jeep® CJ-5 **ONLY**.

Section One – Installation Instructions

1. Position the Console in the desired position between the Driver/Passenger seats (Figure 1).
 2. Position the Mounting Bracket under the rear of the Console with the legs of the Mounting Brackets level to the floor (Figure 2).
- NOTE:** The installation of the Mounting Bracket will not be required for the 76-83 CJ-5.



Figure 1



Figure



Section One – Installation Instructions *continued*

3. Adjust the position of the Console front to back and ensure that the shifter clearance for all gears is not obstructed by the Console position (Figure 3).
4. Using a pen, mark the position of the Mounting Bracket on the bottom of the Console. (Figure 4).

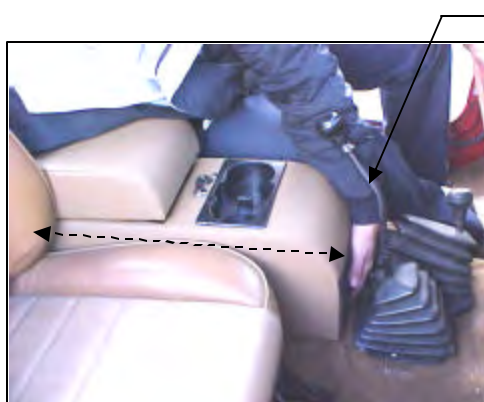


Figure 3 (13101.xx console shown for reference only. Installation is the same for 13102.XX)

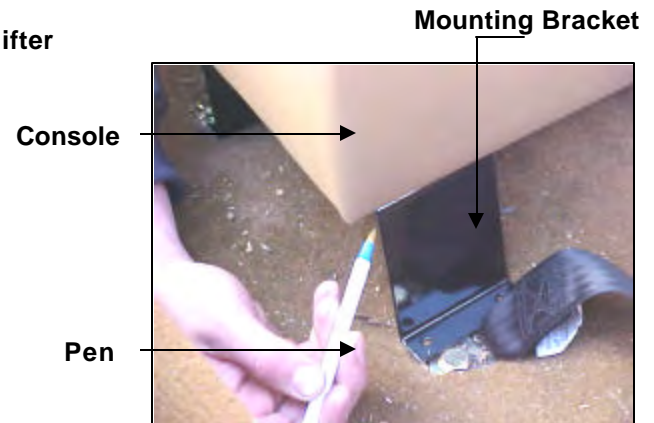


Figure 4

5. Once the position is marked, remove the Console from the vehicle and set on a clean working table.
6. Reposition the Mounting Bracket over the marks previously made in Step 4.
7. Secure the Mounting Bracket to the Console using the (2) 8 X $\frac{3}{4}$ " Sheet Metal Screws provided (Figure 5). Open the console to gain access to the inside of console. (Figure 7 - 8).
8. Re-Position the Console between the Driver and Passenger seats.
NOTE: Position the Console as far forward as possible without interfering with the shifter.
9. Locate the (4) mounting holes on the Mounting Bracket.
10. Using the mounting holes as a drilling guide, drill (4) holes through the floor of the vehicle using 1/8" drill bit (Figure 6).



CAUTION: Take care not to cut or trip any wires/lines that might be in the area.



11. Secure Console and Mounting Bracket to the floor of the vehicle using the (4) 8 X $\frac{3}{4}$ " Sheet Metal Screws provided.

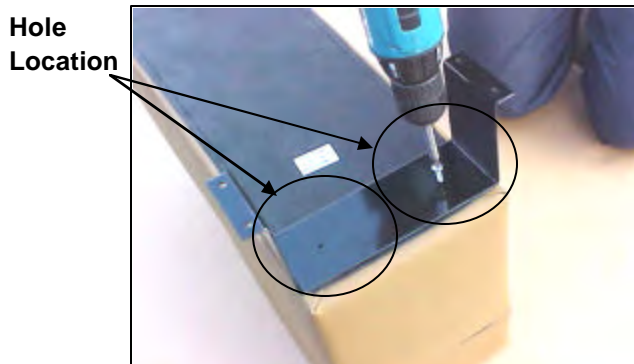


Figure 5

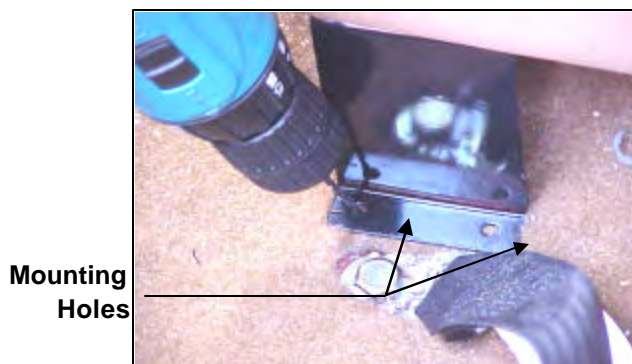


Figure 6



Figure 7



Figure 8

Section One – Installation Instructions *continued*

NOTE: To ease installation pop the front cup holder from console (fig7)

12. Drill one hole in the center and as far forward as possible through the bottom of the Console and the floor of the vehicle using a $\frac{3}{16}$ " drill bit (Figure 9).



13. Secure using (1) 14 X 1 3/4" Sheet Metal Screw provided.

NOTE: For more support you opt to install (2) Sheet Metal Screws in the front of the console.

13101.xx console used in image. For 13102.XX open the front locking Compartment to gain access to front of console.



Figure 9



Ensure that all Screws are securely fastened to the vehicle prior to traveling.

Section Two- Installation Instructions

1. Position the Console in the desired position between the Driver and Passenger seats as shown in Figure 1.
2. Adjust the position of the Console front to back and ensure that the shifter clearance for all gears is not obstructed by the Console position (Figure 2)
NOTE: Position the Console as far forward as possible without interfering with the shifter.
3. Open the console to gain access to the rear most section of the console. Drill (2) holes through the rear of the Console and floor of the vehicle using 3/16" drill bit.



Figure 1



Figure2



CAUTION: Take care not to cut or trip any wires/lines that might be in the area.

4. Secure the Console to the floor of the vehicle using the (2) 14 X 1 $\frac{3}{4}$ " Sheet Metal Screws provided.
5. Remove the front cup holder to gain access to the front of console. Drill one hole in the center and as far forward as possible through the bottom of the Console and the floor of the vehicle using a $\frac{3}{16}$ " drill bit (Figure 4).
6. Secure using (1) 14 X 1 $\frac{3}{4}$ " Sheet Metal Screw provided.

NOTE: For the console to the floor support, you opt to install (2) 14 X 1 $\frac{3}{4}$ " Sheet Metal Screws instead of (1).



Ensure that all Screws are secure

Made in China