






11232.23 : LED Fog Light Brackets - Round 11232.24 : LED Fog Light Brackets - Square

## LED FOG LIGHT BRACKETS

## Contents:


<ol> <li>LED Fog Light Bracket</li> <li>L-Bracket</li> <li>Hex Bolt</li> <li>Locknut</li> <li>Spacer</li> <li>Flat washer</li> <li>Tapping Screw</li> </ol>	(2) (2) (2) (2) (2) (4) (8)
---	---

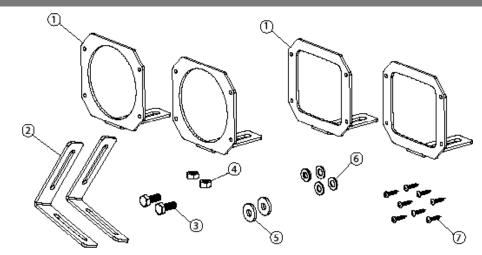

**NOTICE** LED Fog Light Brackets are compatible with most LED designs; however, we recommend using Rugged Ridge LEDs for best results.

**NOTICE** Minor relocation of vacuum pump may be required for installation on 2012 and newer Jeep Wrangler vehicles.


- 1. Remove Bumper (Refer to the factory manual or Instructions for your aftermarket Bumper)
- 2. Remove fog lights from bumper.



## For use with Rugged Ridge LEDs

- 3. Mount LED to LED Fog Light Bracket using supplied hardware and Spacer.
- 4. Slide LED forward to set desired depth for bumper installation and tighten.

**NOTICE** Spacer is required for mounting Rugged Ridge LEDs and may not be required with other brands. Use spacer as needed.



OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8am - 5pm EST 1-800-449-6649 | EMAIL: techsupport@omix-ada.com

FOR WARRANTY INFORMATION VISIT: www.Omix-Ada.com








11232.23 : LED Fog Light Brackets - Round 11232.24 : LED Fog Light Brackets - Square

## LED FOG LIGHT BRACKETS

For use with non-Rugged Ridge LEDs

- 5. Mount LED to L-Bracket
- 6. Mount L-Bracket to LED Fog Light Bracket.
- 7. Adjust LED to desired position for bumper installation and tighten.

**NOTICE** Hardware orientation may be reversed for clearance depending on bumper/ light combination.



9. Reinstall bumper.

