I - Sheet Number VV140 Rev.C

Ventvisor® Deflector

For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

Important Safety Information

- CAUTION - Before driving, ensure that the vent visor is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

Contents - 2 Piece Set

NOTE: Actual product may vary from illustration.



Front Driver Side Visor



Front Passenger Side Visor




Alcohol Pad x2

Contents - 4 Piece Set



Front Driver Side Visor



Front Passenger Side Visor



Rear Passenger Side Visor



Rear Driver Side Visor



Alcohol Pad x4

Tools Required




Car Wash Supplies



Clean Towel

Preparation Before Painting / Installation

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.
- **Ensure vehicle surface and part are above 60°F (15°C) prior to installation.**




Installation Steps

NOTE: Actual application may vary slightly from illustrations.




Clean the window channel with an alcohol pad.

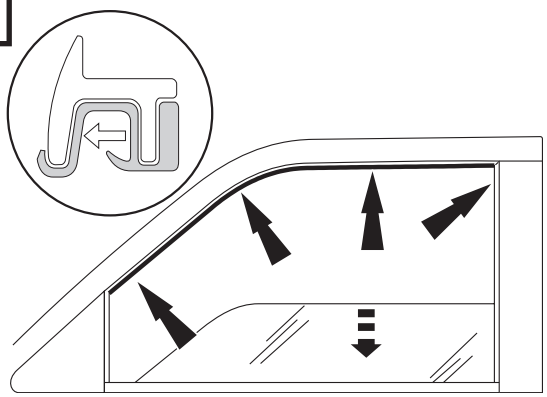

1

Peel back 2" (5 cm) of tape line from each end of top flange.

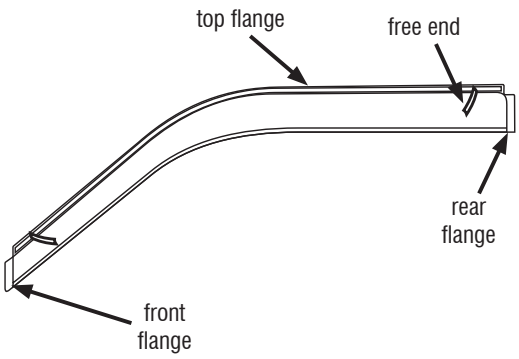


2

Installation Steps

NOTE: Actual application may vary slightly from illustrations.


3

Insert visor into window channel. Front and rear flanges insert between the rubber trim and the mirror cap / door frame. Top flange slides into the window channel.

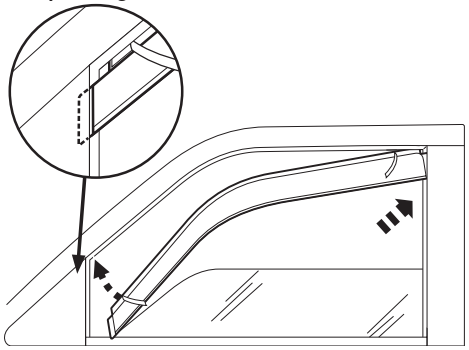

4


Remove tape liner by pulling on free ends. Raise window slowly and leave up for 24 hours to secure visor to window channel.

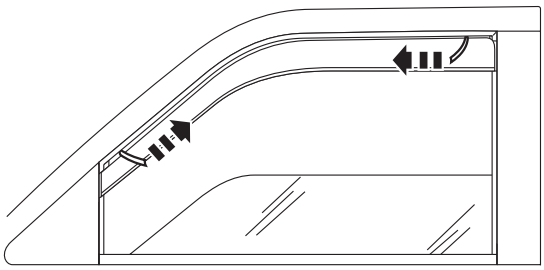

4 Piece Set

Install the rear visors using the same preparation and installation methods as the front visor. Note that the rear flange slides into the window channel, and the front flange fits between the post and window trim.

5

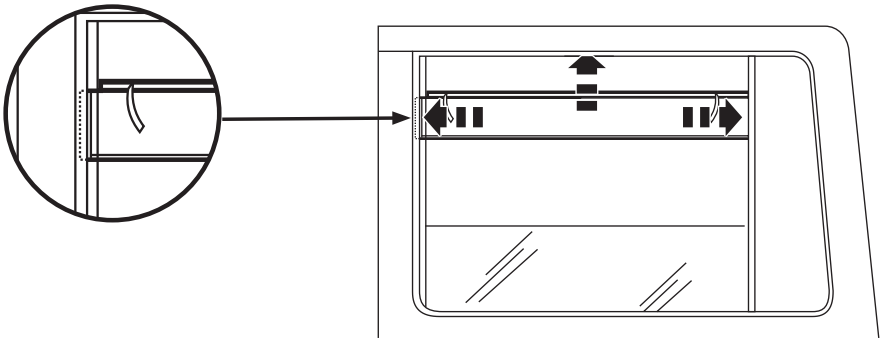

Care and Cleaning

- Wash only with mild soap & dry with a clean cloth.

The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.

Congratulations!

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

HUSKY LINERS

1-800-344-8759 • Visit us at huskyliners.com

© 2025 Husky Liners, Inc. All rights reserved.
Husky® and the Husky® logo are trademarks of Husky Liners, Inc.