



ZEON XC

ULTIMATE PERFORMANCE, COMPACT PACKAGE

LOW-PROFILE WINCH DELIVERS BEST-IN-CLASS PERFORMANCE AND CAPACITY

The compact, low-profile ZEON XC winch delivers unmatched performance with best-in-class line speed and capacity. Engineered, tested, and assembled at our Clackamas, Oregon facility, ZEON XC is a premium, ultra-reliable recovery tool that's backed by the industry's leading warranty.

ZEON XC offers all the performance of our premium ZEON XD winch, but with a classic low-profile shape that's ideal for installation into vintage applications. And while its overall size might be reduced its specs are not. With ZEON XC you get ultra-reliable IP68/IP69K waterproof construction, blazing fast no-load line speeds of up to 40 ft/min, and a durable powder-coated finish with corrosion resistant black fasteners that meet the highest OEM-grade specifications.

Big on features, smaller in size, ZEON XC is a top choice for hidden bumper mounts. The all-new low-profile control pack sits lower than the winch tie plate, and features a bus bar connection to the motor for added efficiency. This control pack features a WARN exclusive low-profile Albright contactor for the ultimate in control and reliability. The remote socket plug can be easily relocated up to 9" away from the control pack without disassembly, making winch control easy when mounted behind the bumper. And for the tightest installs, the control pack can be relocated using WARN's control pack relocation kit (sold separately).

ZEON XC is available in capacities ranging from 10,000 to 14,000 lbs., plus your choice of steel, synthetic, or no rope at all. ZEON XC winches include a limited lifetime warranty and seven-year electrical warranty, all backed by Warn's US-based customer service team and a full line of service parts and accessories.



NOW AVAILABLE IN
CAPACITIES UP TO
14,000 LBS.



KEY FEATURES:

- All the performance of the ZEON XD winches but in a more compact size for mounting in tighter spaces
- Available in 10,000 lb., 12,000 lb., and 14,000 lb. capacities
- Your choice of durable steel or easy-to-handle Spydura synthetic rope
- High-performance, high-efficiency motor and geartrain delivers blazing fast no-load line speeds of up to 40 ft/min—the fastest in its class
- Reliable waterproof construction features o-ring rubber sealing. The entire winch is IP68 submersion and IP69K high pressure spray rated
- Corrosion resistant black fasteners meet the highest OEM-grade specifications
- All-new low-profile control box with WARN exclusive Albright contactor and bus bars for ultimate control, reliability and efficiency
- Remote socket can be relocated up to 9" away from control pack without disassembly
- Control pack can be relocated off of the winch using one of WARN's control pack relocation kit (PN 111872: ZEON XC 31" relocation kit; PN 111991: ZEON XC 78" relocation kit)
- Motor can be rotated up to 90° forward; control pack moves with motor; transmission can be clocked up to five different positions
- The ZEON XC fairleads can be utilized for both feet down and feet forward installations — no separate offset fairlead is needed
- Large diameter aluminum-alloy drum reduces rope wear and helps to dissipate brake heat. The patented rope anchor system is the strongest on the market, and allows for easy rope installation
- Automatic load-holding cone brake offers excellent control and holding strength
- Exceptionally durable corded remote with 12' lead
- Industry-leading warranty: Limited lifetime mechanical, seven year electrical—all backed by a global service network

ZEON XC WINCH LINEUP



ZEON XC 10-S 10,000 lbs. single-line pulling capacity. Equipped with 100' of 3/8" Spydura synthetic rope, Epic hawse fairlead, and ruggedized corded remote. **110510**



ZEON XC 10 10,000 lbs. single-line pulling capacity. Equipped with 80' of 3/8" steel rope, roller fairlead, and ruggedized corded remote. **110410**



ZEON XC 10 (bare drum) 10,000 lbs. single-line pulling capacity. Winch only with ruggedized corded remote. Rope and fairlead sold separately. **110310**



ZEON XC 12-S 12,000 lbs. single-line pulling capacity. Equipped with 80' of 3/8" Spydura Pro synthetic rope, Epic hawse fairlead, and ruggedized corded remote. **110512**



ZEON XC 12 12,000 lbs. single-line pulling capacity. Equipped with 80' of 3/8" steel rope, roller fairlead, and ruggedized corded remote. **110412**



ZEON XC 12 (bare drum) 12,000 lbs. single-line pulling capacity. Winch only with ruggedized corded remote. Rope and fairlead sold separately. **110312**



ZEON XC 14-S 14,000 lbs. single-line pulling capacity. Equipped with 80' of 3/8" Spydura Pro synthetic rope, Epic hawse fairlead, and ruggedized corded remote. **110514**



ZEON XC 14 (bare drum) 14,000 lbs. single-line pulling capacity. Winch only with ruggedized corded remote. Rope and fairlead sold separately. **110314**

ZEON XC 10 SPECIFICATIONS

Part number: 110510 (XC-S), 110410 (XC), 110310 (no rope)
Rated line pull: 10,000lbs (4536kg) single-line
Motor: 12V DC, series wound
Electrical controls: Albright contactor
Remote control: Remote switch, 12' (3.7m)
Gear train: 3-stage planetary
Gear ratio: 141:1
Clutch (freespooling): Rotating ring gear
Brake: Automatic, six segment mechanical cone
Drum diameter/length: 3.15"/9.0" (80mm/229mm)
Rope: 110510: 3/8" x 100' (9.52m x 30m) Spydura synthetic, 110410: 3/8" x 80' (9.52m x 24m) steel, 110310: no rope
Fairlead: 110510: Epic black anodized forged aluminum hawse, 110410: steel roller, 110310: not included
Recommended battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72" (1.83m)
Finish: Satin-black powder coat
Corrosion protection: 408-hour salt spray, OEM grade fasteners
Sealing: IP68/IP69K rated waterproof
Warranty: Limited lifetime mechanical, 7 years electrical
Dimensions: length: 22.06" (560.3mm), height: 7.83" (198.8mm)
Mounting Bolt Pattern: 10" x 4.5" (254mm x 80mm)


ZEON XC 12 SPECIFICATIONS

Part number: 110512 (XC-S), 110412 (XC), 110312 (no rope)
Rated line pull: 12,000lbs (5443kg) single-line
Motor: 12V DC, series wound
Electrical controls: Albright contactor
Remote control: Remote switch, 12' (3.7m)
Gear train: 3-stage planetary
Gear ratio: 176:1
Clutch (freespooling): Rotating ring gear
Brake: Automatic, six segment mechanical cone
Drum diameter/length: 3.15"/9.0" (80mm/229mm)
Rope: 110512: 3/8" x 80' (9.52m x 24m) Spydura Pro synthetic, 10412: 3/8" x 80' (9.52m x 24m) steel, 110312: no rope
Fairlead: 110512: Epic black anodized forged aluminum hawse, 110412: steel roller, 110312: not included
Recommended battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72" (1.83m)
Finish: Satin-black powder coat
Corrosion protection: 408-hour salt spray, OEM grade fasteners
Sealing: IP68/IP69K rated waterproof
Warranty: Limited lifetime mechanical, 7 years electrical
Dimensions: length: 22.06" (560.3mm), height: 7.83" (198.8mm)
Mounting Bolt Pattern: 10" x 4.5" (254mm x 80mm)

ZEON XC 14 SPECIFICATIONS

Part number: 110514 (XC-S), 110314 (no rope)
Rated line pull: 14,000lbs (6350kg) single-line
Motor: 12V DC, series wound
Electrical controls: Albright contactor
Remote control: Remote switch, 12' (3.7m)
Gear train: 3-stage planetary
Gear ratio: 213:1
Clutch (freespooling): Rotating ring gear
Brake: Automatic, six segment mechanical cone
Drum diameter/length: 3.15"/9.0" (80mm/229mm)
Rope: 110514: 3/8" x 80' (9.52m x 24m) Spydura Pro synthetic, 110314: no rope
Fairlead: 110514: Epic black anodized forged aluminum hawse, 110314: not included
Recommended battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72" (1.83m)
Finish: Satin-black powder coat
Corrosion protection: 408-hour salt spray, OEM grade fasteners
Sealing: IP68/IP69K rated waterproof
Warranty: Limited lifetime mechanical, 7 years electrical
Dimensions: length: 22.06" (560.3mm), height: 7.83" (198.8mm)
Mounting Bolt Pattern: 10" x 4.5" (254mm x 80mm)

ZEON XC DIMENSIONS (all models)

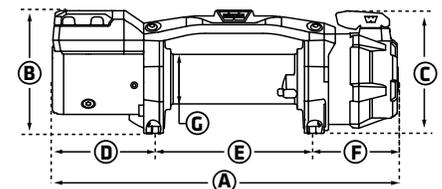

A 22.05" (560.3mm)	E 10.0" (254.0mm)
B 7.83" (198.8mm)	F 5.44" (138.1mm)
C 7.82" (198.7mm)	G 3.15" (80.0mm)
D 6.63" (168.3mm)	

Depth (maximum distance from front to back): 6.73" (171.1mm)