

Running Board Installation Instructions

82069

Dodge Ram Mega Cab (10-C)2500/3500
(11-C)4500/5500

Adjustable Height Brackets System (Standard and 1 1/4" Drop)

Read all instructions before beginning installation.

INSTALLATION PACKAGE

Running Board	2
Brackets Front, Middle & Rear	6
Bolt Pack (Boards & Brackets)	2

Necessary Tools

1/2" Combination wrench or Ratchet wrench with deep well socket
Safety glasses


Bolt Pack Brackets

5/16" Double Studded Bolt Plates	6
5/16" Flat Washers	12
5/16" Serrated Flange Nut	12
Plastic Bolt Retainers	6


Bolt Pack Running Boards

5/16" x 3/4" Hex Bolt	12
5/16" Serrated Flange Nut	12


Step 1: There are 3 factory mounting location underneath your truck below the doors pictured below (**Fig 1**): Front, Middle and Rear. Look for 2 hex holes and a bigger oval hole with tape over it. Peel the tape off the front, middle and rear location.

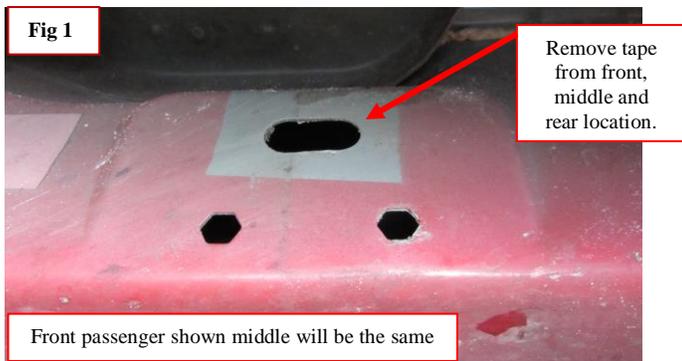

Step 2: Start by installing the double studded bolt plate through the bigger slot with the small stud coming through the hex hole and the longer stud through the big oval hole (**Fig 2**). Place plastic bolt retainer not shown over small stud in hex hole to stop bolt plate from falling into open cavity. It can be installed on threads by turning just like a nut. Driver side will use opposing hex hole for small stud.

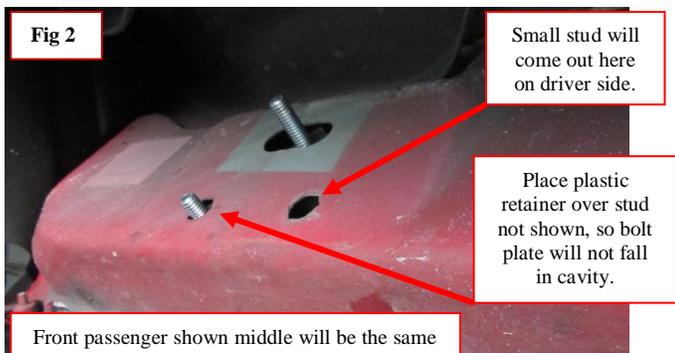

Step 3: Place bracket over bolt studs as shown (**Fig 3**). These brackets are adjustable (Standard bottom slots and 1 1/4" Drop height top slots). This is a customer preference. Typically boards that are 1/2" to 2" from board mounting area to top of step are Standard height boards. Boards that are 2" or more use the 1 1/4" Drop. You may want to install a front and rear bracket to place board on to see what looks and works best for you. Loosely secure all front and middle locations with 5/16" washer and nut.

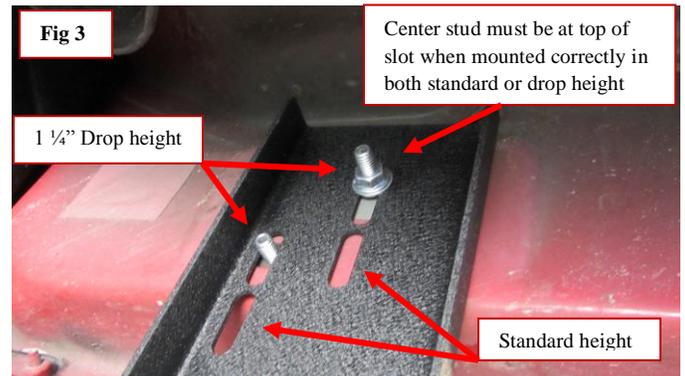

Step 4: The final installation of all the brackets will look like this.



Step 5: Now install running boards on brackets. You may have different boards than shown. However, they will have the same type of mounting unless additional installation instructions are provided. Obtain the bracket to board bolt pack. Take out the provided 5/16" x 3/4" bolts. Slide the head of the bolts down the channels on the underside of the board.



Step 6: Place the board on the installed mounting brackets. Align the bolts with the holes on the brackets and drop them into place. Next thread the provided 5/16" flange nuts onto the bolts. Do not tighten. Adjust the board in or out, right or left to meet your needs. Once the boards are in place to your liking, tighten all fasteners on the boards and brackets. This will complete your installation. Enjoy!

