

Running Board Installation Instructions

87010

Nissan Pathfinder (2013-C)
 Infinity QX60 (2014-C)

Read all instructions before beginning installation.

INSTALLATION PACKAGE

Running Board	2
Brackets Front (Shorter)	2
Brackets Middle	2
Brackets Rear (Angled)	2
Bolt Pack (Boards & Brackets)	2

Necessary Tools






10mm & 13mm" Combination wrench or Ratchet wrench
 Safety glasses

Bolt Pack Brackets

8mm In-Pull Nut	11
8mm x 20mm Bolts	5
8mm x 25mm Bolts	6
Flat Washers	12

Bolt Pack Running Boards

8mm x 20mm Hex Bolt	12
8mm Serrated Flange Nut	12

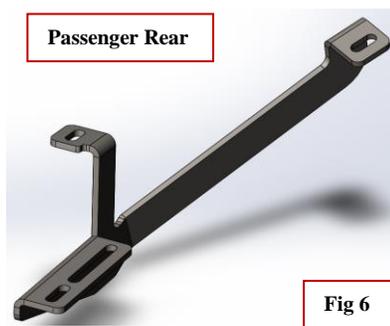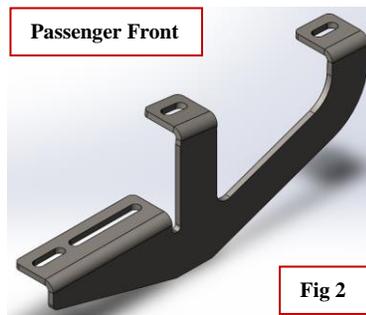


Step 1: There are 7 black plugs just underneath your vehicle below the doors pictured below (Fig 7). You will be removing 2nd, 4th and 6th. This will be where the brackets will mount.



Step 2: We will use the (11) In-Pull Nuts provided to install the brackets. To install put the In-Pull Nut up in the hole (Fig 8) and gently pull back and slide the tab back on the outside of the hole as shown (Fig 9) or bend tab back as shown (Fig 10) to secure fastener. (2015+ model years vehicles have thicker material and should be installed using (Fig 10)) Be careful not to lose the In-Pull nut in the open cavity.




Step 3: Starting on passenger front. Remove 2nd black plug and install In-Pull nuts as shown (Fig 11)

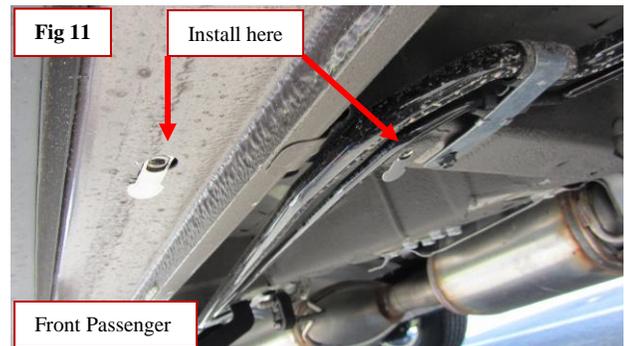

Step 4: The easiest way to install the brackets is to place bracket against In-Pull Nut holding it in place with the slot lined up with the hole in the In-Pull Nut. Now use the provided 8mm x 20mm bolt & washer to loosely secure inner hole in bracket.




Step 5: Install 8mm x 25mm fasteners in all holes where you've removed the black plug. You will only install the bolt 1 to 1 ½ turns, just enough to hold bracket in place. This will be an important step to allow board to be installed on the brackets with the small amount of room available

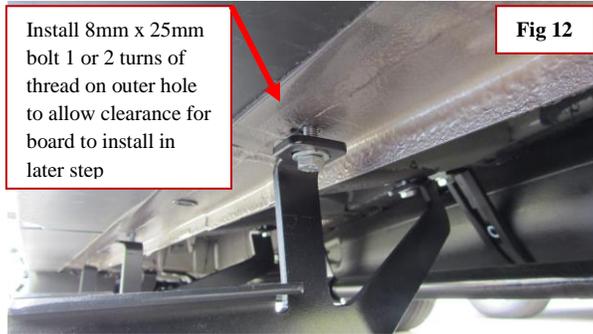


Step 6: This is the front passenger bracket installed. Bracket is shown fully tightened but should be installed loose as indicated Step 5 (Fig 12)




Step 7: This is the middle passenger bracket installed. The front is installed in the 4th black plug hole and the back of bracket is installed using factory fastener. (Fig 15) Remove with 10mm wrench and place washer over fastener and reinstall with bracket. Bracket is shown fully tightened but should be installed loose as indicated Step 5 (Fig 12)

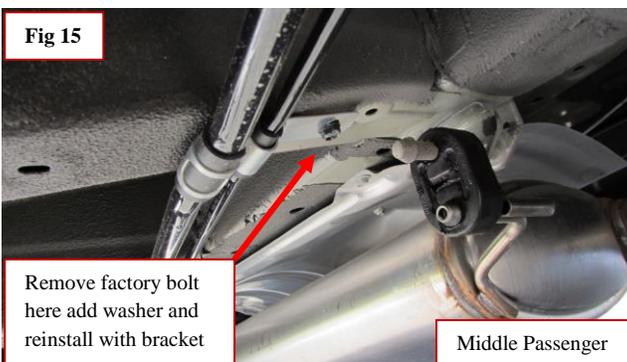

Step 8: This is the rear passenger bracket installed. The outer is installed in the 6th black plug hole. This bracket has an angle. The back of bracket will install towards the front of vehicle on the cross member as shown (Fig 16). Bracket is shown fully tightened but should be installed loose as indicated Step 5 (Fig 12)

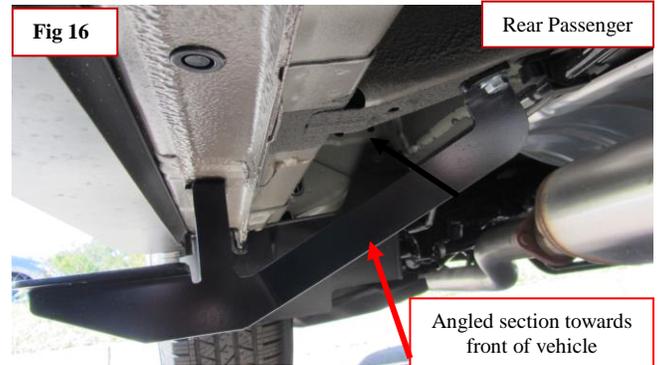

Step 9: The front driver bracket will install just like passenger in the 2nd black plug. Remember to install loose as indicated Step 5 (Fig 12)

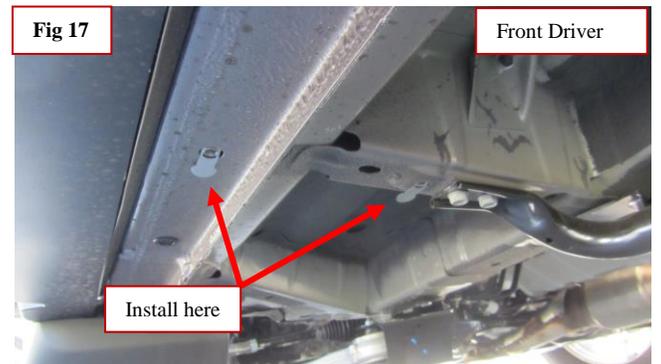


Step 10: The middle driver bracket will install just like passenger in the 4th black plug. The back of this bracket will install using an In-Pull Nut not a factory bolt. Remember to install loose as indicated Step 5 (Fig 12)




Step 11: The rear driver bracket will install just like passenger in the 6th black plug. Remember to install loose as indicated Step 5 (Fig 12)



Step 12: Rear splash guard will need to be removed or cut to have boards fit properly on vehicle.

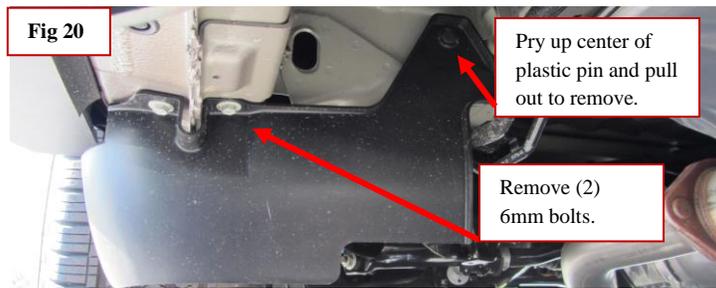


Step 14: This will show you the location and what the brackets should look like after you have them installed on the vehicle. The driver and passenger will look the same. Rear Bracket should face the front and the front should face the rear.

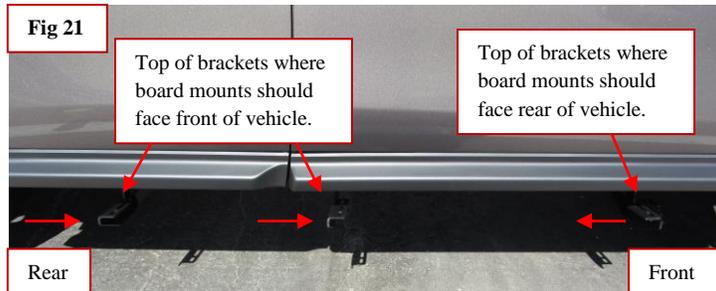

Step 13: Now install running boards on the brackets. Obtain the bracket to board bolt pack. Take out the provided 5/16" * 3/4" bolts. Slide the head of the bolts down the channels on the underside of the board.



Step 14: Place the board on the installed mounting brackets. Align the bolts with the slots on the brackets and drop them into place. This is a tight fit and why the bolts from Step 5 (**Fig 12**) were left loose. Next thread the provided 5/16" flange nuts onto the bolts that hold the board and leave loose.

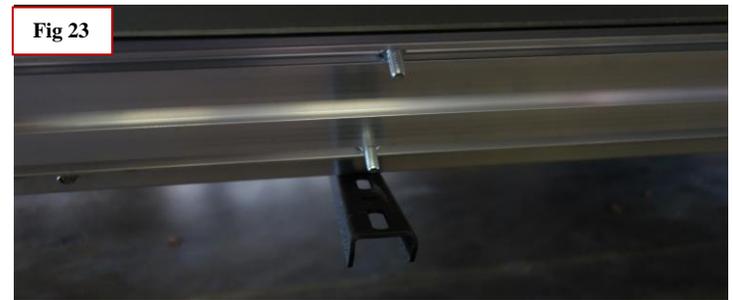

Now loosely tighten outer bracket bolts left slightly threaded from Step 5 (**Fig 12**). Adjust the board in or out, right or left to meet your needs. Once the boards are in place to your liking, tighten all fasteners on the brackets then the boards. Front and rear brackets should be adjusted all the way out away from the vehicle for best fit. This will complete your installation. Enjoy!

Step 15: To view the instructions with clear pictures that can be zoomed in and out. Please visit our instruction page at the web address below.

www.runningboardwarehouse.com/installationinstructions.aspx