

APPLICATION

Toyota Tacoma Double Cab
Toyota Tacoma Access Cab*

MODEL YR


2016-2023
2016-2023

PART

75162-01A
75162-01A

* Modification required to running board assembly. See Item 1 on page 9.

INSTALLATION GUIDE

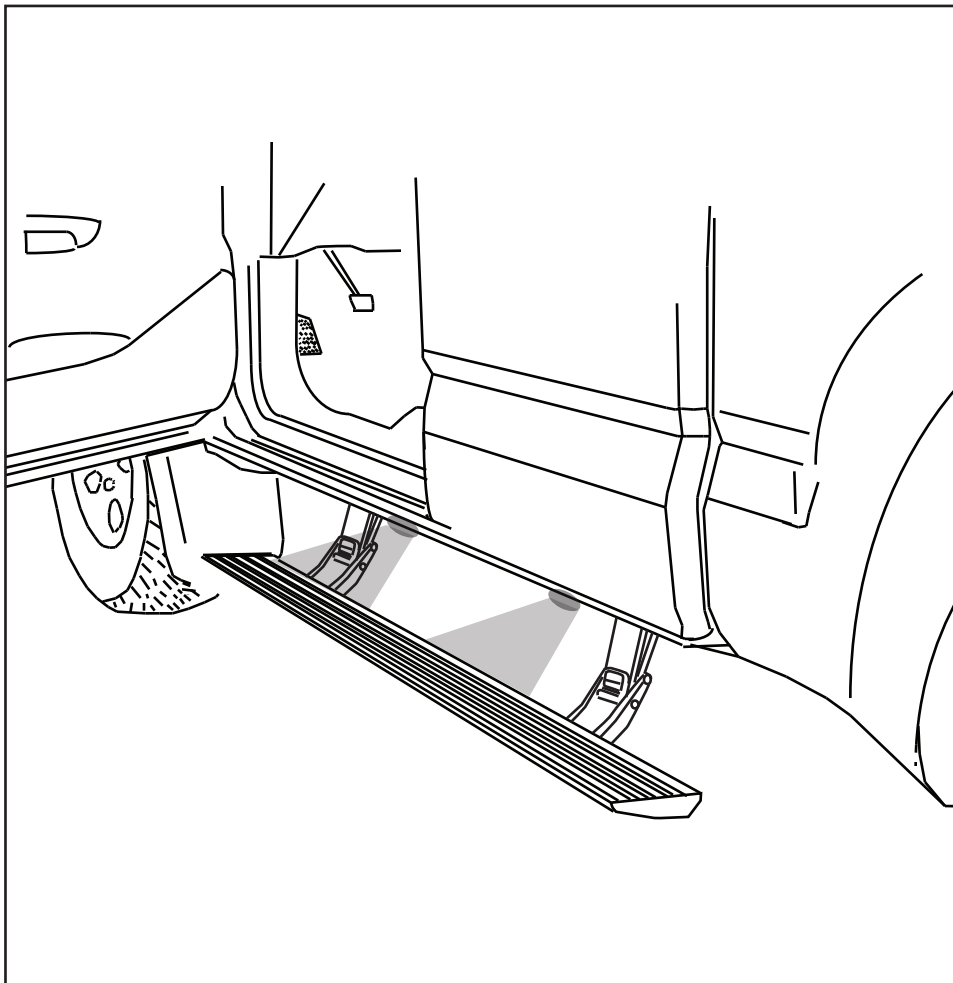**INSTALLATION TIME****3-5 Hours**

Professional installation recommended

SKILL LEVEL

4= Experienced

TOOLS REQUIRED

- ☐ Safety goggles
- ☐ Measuring tape
- ☐ 19 mm socket
- ☐ 10 mm socket
- ☐ 12 mm socket
- ☐ Ratchet wrench and extension
- ☐ Pliers
- ☐ Wire crimpers
- ☐ Wire stripper / cutter
- ☐ 3/16" hex key wrench (allen wrench)
- ☐ 4mm hex key wrench (allen wrench)
- ☐ Electrical tape
- ☐ Weather proof caulking (silicone sealer)
- ☐ 1/8", 9/32" & 9/16" drill bit
- ☐ Drill
- ☐ T-25 Torx
- ☐ Heat Gun

WARRANTY**5-Year Limited Warranty**


REALTRUCK TECH SUPPORT 1-888-983-2204 (Press 2) Monday - Friday, 8:00 AM - 5:00 PM EST

Designed and manufactured by RealTruck AMP Research® • Made in Mexico
Patent Protected. Please see our product site for applicable patents. www.realtruck.com/b/amp-research/
© RealTruck Group, Inc., 2026 • Five-year limited warranty. • Professional installation is recommended.

INSTALLATION GUIDE

Attaching motor to Linkage assembly

The motors must be attached to the Linkage assemblies before mounting to vehicle.

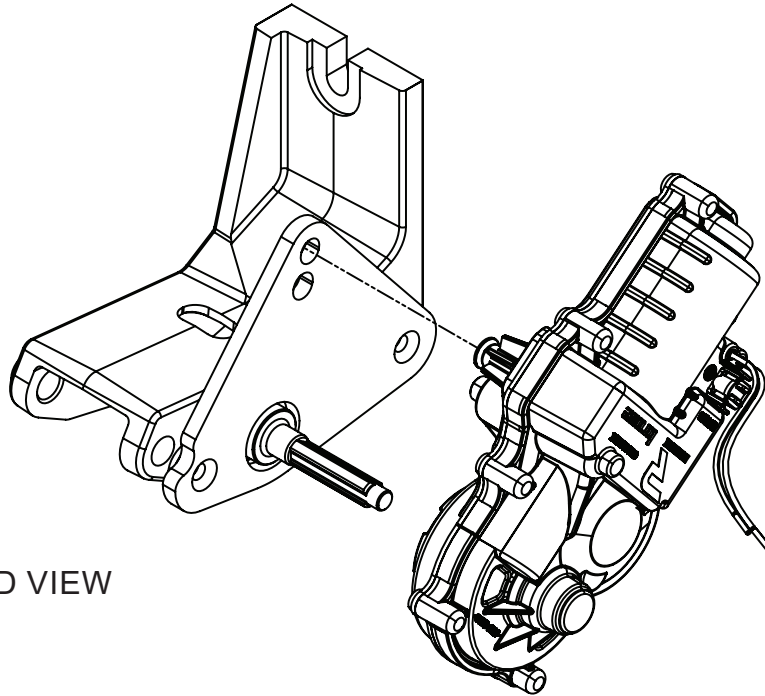

EXPLODED VIEW

- Motor
- Fastener

CAUTION: HANDLE WITH CARE.

To ensure our customers receive all components with full integrity, we pack the motors separate from their Linkage assemblies. This requires that the installer position and fasten the motor before continuing with the install. Please follow the instructions below and handle the assembly carefully.

CAUTION: Dropping the assembly or any excessive impact MAY cause damage to the motor.

Instructions:

1. Slide motor on to drive shaft.
2. Rotate motor by hand while on the shaft to position it to the mounting plate (orientation as shown above).
3. Fasten motor to the motor mounting plate using supplied PT Screw with T-25 Torx driver. Tighten screw to 60 in-lbs (6.8 N·m). **Do not over torque.**

Note:

The motor and shaft have only three possible positions. Depending on the current position of the motor, motor/shaft and the orientation of the motor plate, it may be necessary to power it in order to align it correctly with the linkage and shaft during assembly so that the motor can be mounted to the mounting plate.

To do this:


1. Power up the motor.
2. Open the door to allow the motor to spin and reposition.
3. Once the motor times out, remove the fuse.
4. Assemble the motor onto the shaft.
5. Fasten motor to mounting plate.

This process may need to be repeated to achieve the correct alignment.


Purpose: Due to vehicle-build variations the Power Step may not correctly align with vehicle cladding. Using supplied shims, please follow the instructions below to correct the alignment.

Misalignment:	Shim Correction:
The gap between board and vehicle cladding is too large toward rear of running board.	Shim rear mount at lower bolt. (diagram below)
The gap between board and vehicle cladding is too small toward rear of running board.	Shim rear mount at upper bolt. (diagram below)
The gap between board and vehicle cladding is too large toward front end of running board.	Shim front mount at lower bolt. (diagram below)
The gap between board and vehicle cladding is too small toward front end of running board.	Shim front mount at upper bolt. (diagram below)

Shim Placement: Place shim(s) **ONLY WHERE NEEDED** as indicated above in “Misalignment/ Shim Correction” chart.

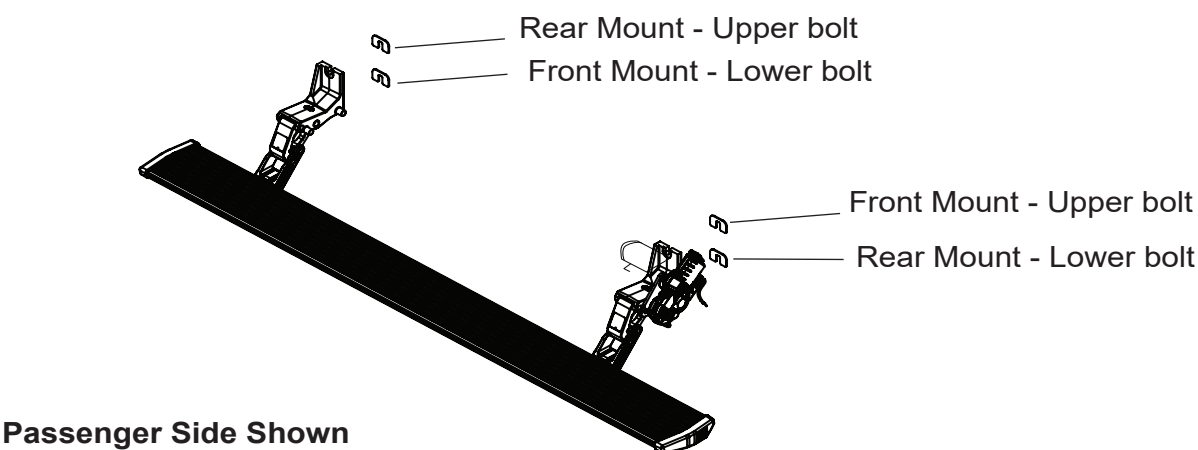

PARTS LIST AND HARDWARE IDENTIFICATION

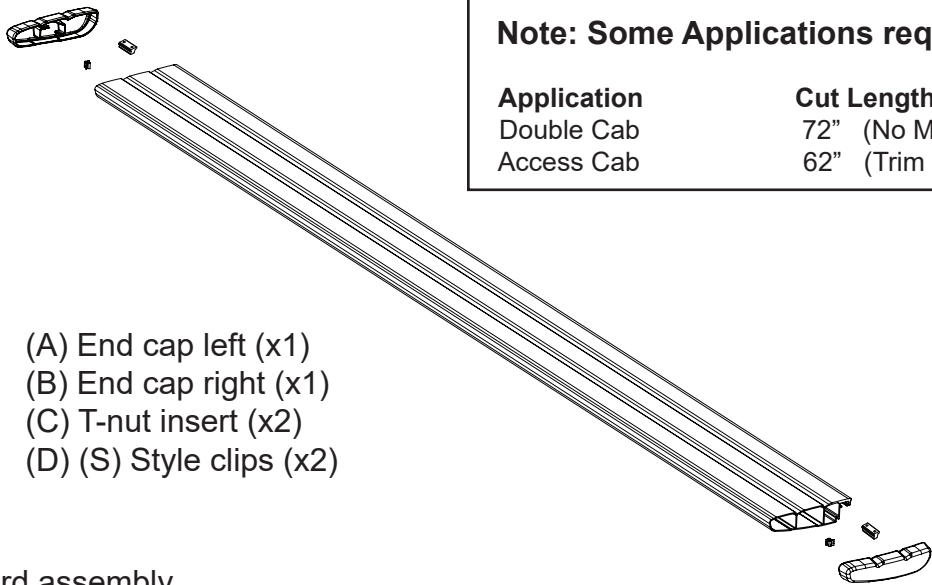


Note: Some Applications require modification.

Application	Cut Length
Double Cab	72" (No Modification Required)
Access Cab	62" (Trim 10")


1 x2

Running Board assembly

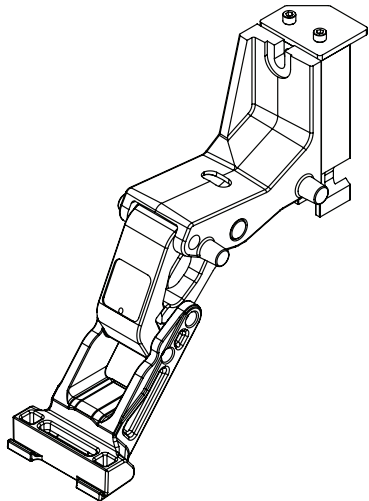


2 x2

Idler Linkage Assembly

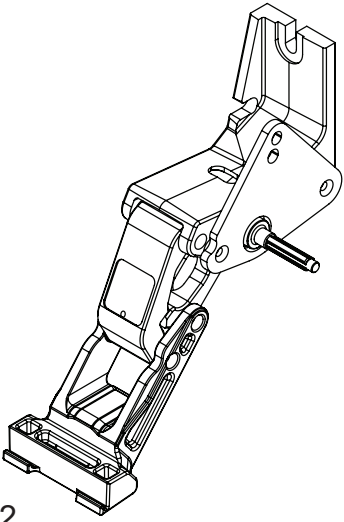


3 x2

Motor Linkage Assembly

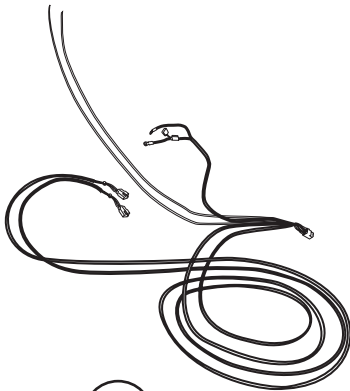


4

Wire Harness

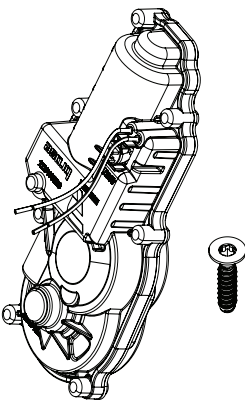

5 x2


Motor Assembly kit




6

Controller SSA


PARTS LIST AND HARDWARE IDENTIFICATION




7
Stand-off




8 x4
Step Shims




9
Shim Kit
Includes x4




10 x20
Cable Tie 7"

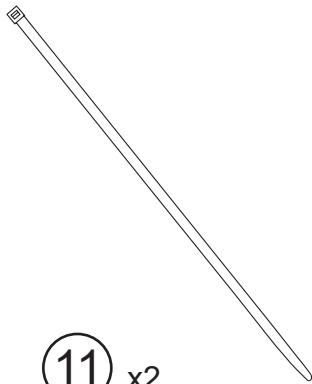


11 x2
Cable Tie 11"




12 x4
Posi-Tite®



13 x4
Posi-Tap™ (Red/Grey)



14 x8
Socket Cap Screw



15
Button Head Bolt



16
M8 Washer




17 x4
Spring Washer




18 x4
M12 Bolt




19 x4
Grommet



20 x4
LED Lamp




21 x8
Butt Connector

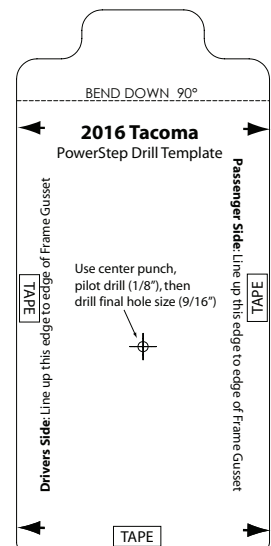


22
Tacoma Drill Template

Remove brake line retainer bolt from driver side front inside frame rail to provide access inside frame.

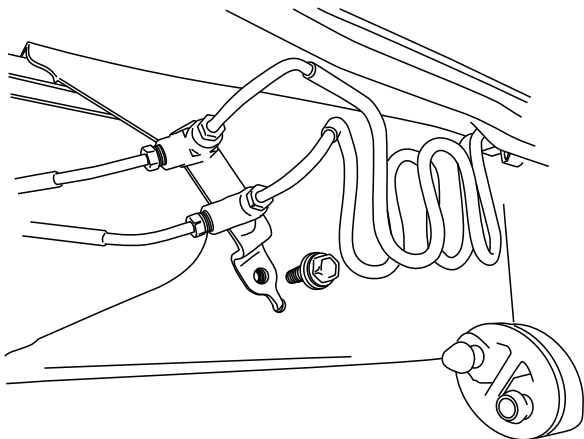


1

Disconnect brake lines from frame by squeezing outside of plastic fastener. CAUTION: Do not break plastic fastener. Disconnect first and third fastener from front.

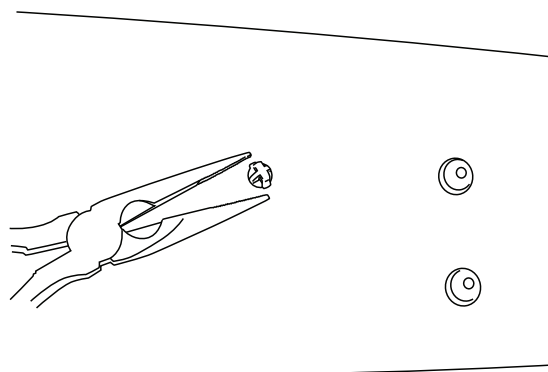

2


Install driver side rear motor linkage through this hole in frame.

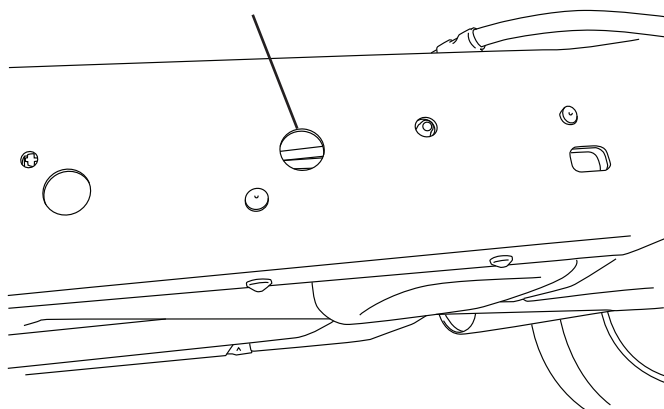

3

Through-bolt linkage to frame as shown in next step.


Secure Linkage Assembly (3) to vehicle frame. FINGER TIGHTEN ONLY.

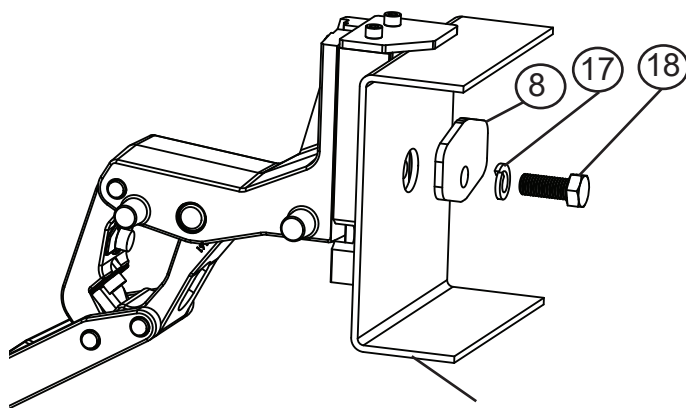

4

part of the vehicle



Use supplied template (22) to mark a hole for front idler installation as shown below. Use tape to hold template in place.

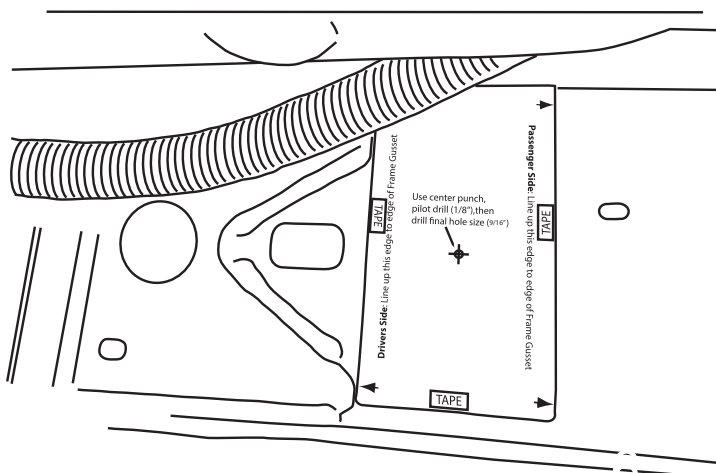

5

Note: Harness clip will need to be removed to allow harness to be moved out of the way


Center Punch hole and pilot drill with an 1/8" drill bit. Then drill final hole size to 9/16". Repeat steps for passenger side of vehicle.

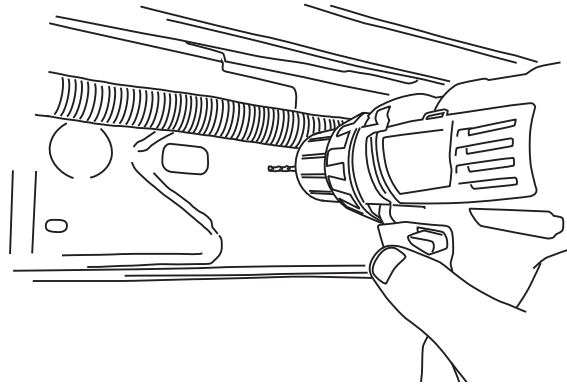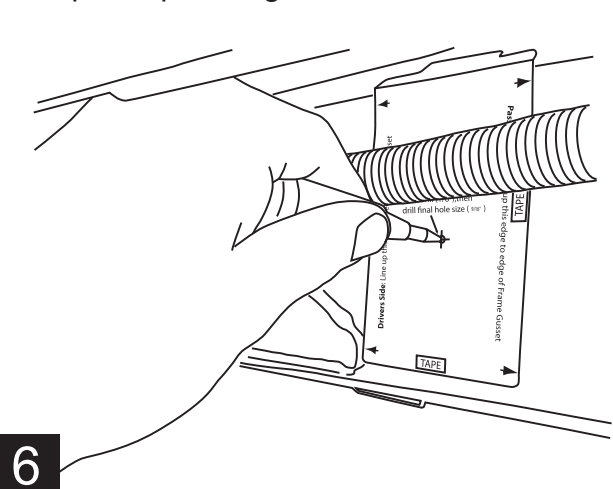

Note: Keep harness away from drill to prevent damage.

Secure Idler Linkage Assembly (2) to vehicle frame.


FINGER TIGHTEN ONLY.

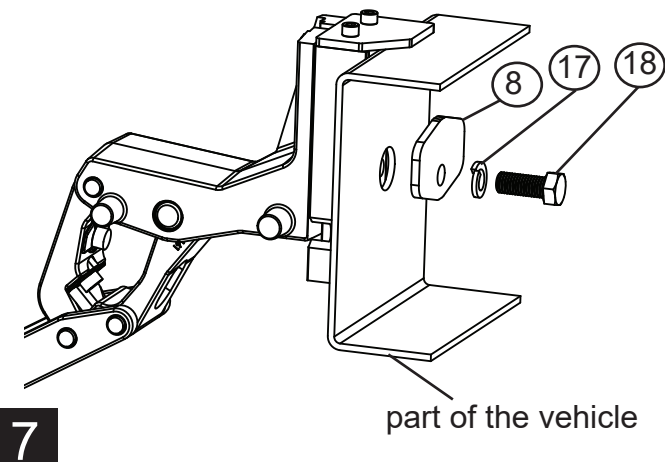

Install brake line stand-off inside driver rear frame rail as shown.


Replace all brake line fasteners.

Repeat steps 3-8 on passenger side of vehicle.

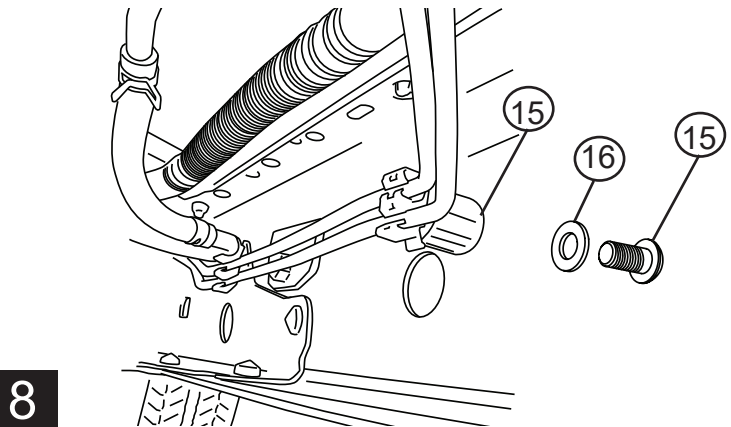

Center running board to doors and mount onto linkages by sliding T-nuts into position.



Measure 18 inches from end of board to side of linkage, as shown below.

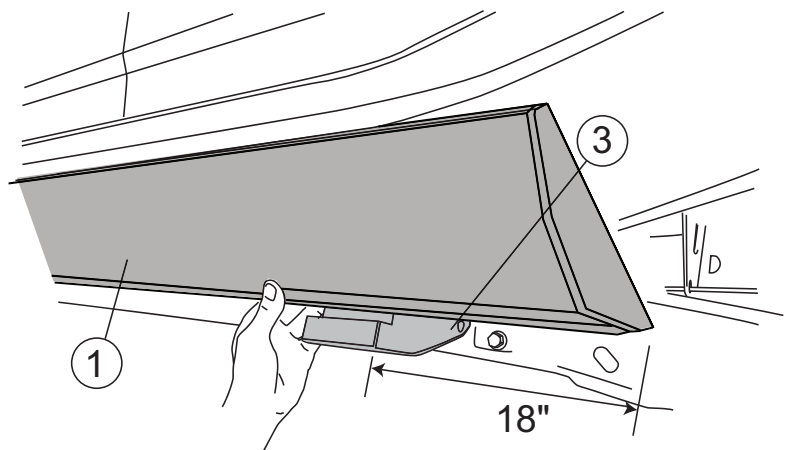

9


Remove fuse.

Secure controller to factory wire loom using supplied 11" wire ties (11). Connect Red fused wire to stud on battery positive terminal. Connect Black wire to ground on inner fender panel.

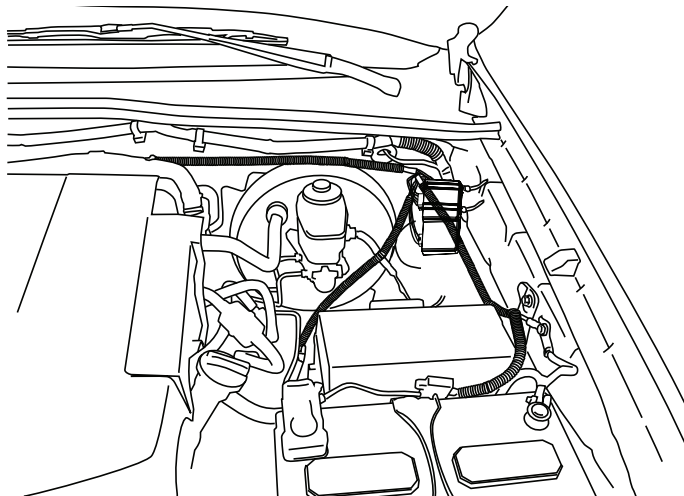


10

Run wire harness as shown outside the frame rails on both sides. Avoid hot, sharp or moving parts! Secure with 7" wire ties (10).

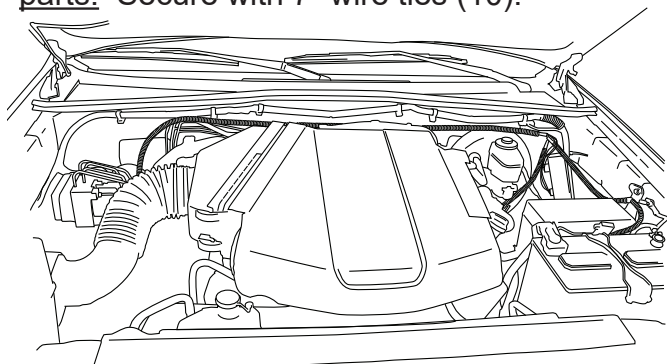


Note: Run loom with Green/Yellow and Pink/Black Trigger wires down drivers side of vehicle.

Pry left foot rest loose at driver side kick panel.

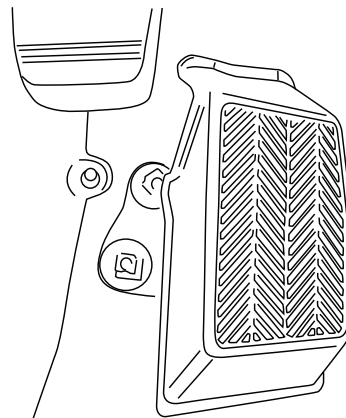


12

Pry up front door sill plates and remove kick panel fasteners and panels on driver and passenger side.

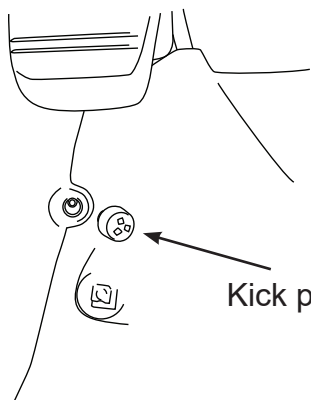

Kick panel fastener



Pull up carpet and locate rubber grommet. Slice the grommet and pass trigger wires from under the vehicle and into the cab.

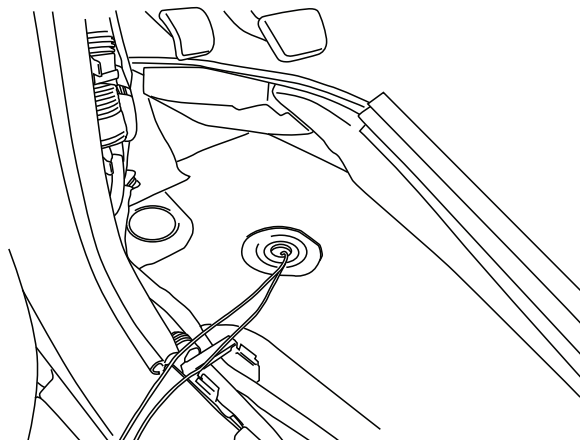

14


13

Posi-Tap Instructions

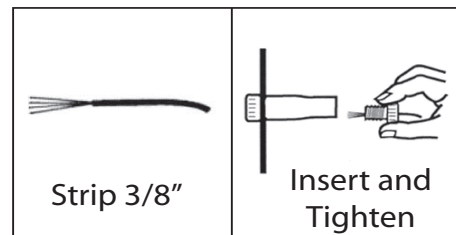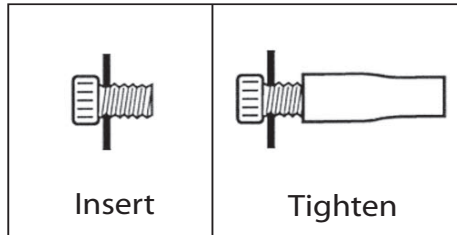


15

Driver side: Locate door ajar signal wires on driver side. Connect the green with yellow stripe wire to the Solid Yellow (**Front Door**) and the Pink with black stripe to the Solid Red or Solid Pink(**Rear Door**). **On access cab models tape off extra wire not used.**

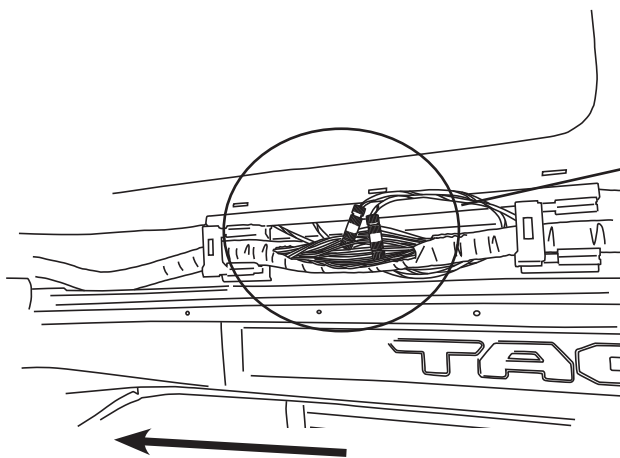

Carefully open wire harness contained in black plastic split loom

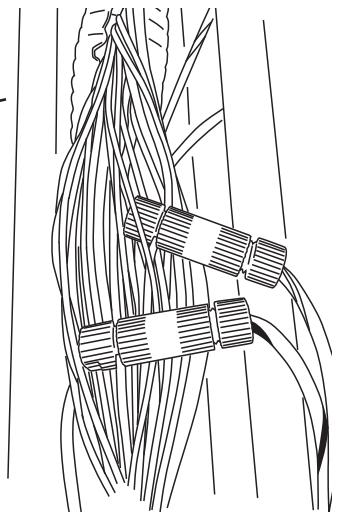


16

Front of Vehicle (Drivers Side)

Passenger side: Locate door ajar signal wires on Passenger side. Connect the Pink with Black stripe wire to the solid green wire(**Front Door**) Connect the Red with Black stripe wire to the Solid Purple wire. (**Rear Door**) Purple wire is located rear of the "T" Junction where wires cross under the front seat. **Note: Three green wires are located in the loom. Look for the lighter shaded wire.** **On access cab models tape off extra wire not used.**

Carefully open wire harness contained in black plastic split loom

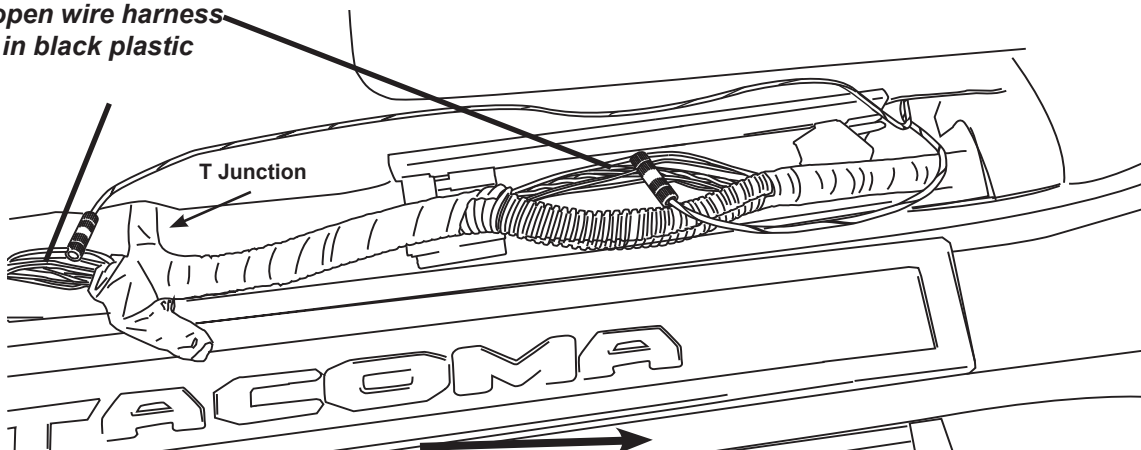

17


Front of Vehicle (Passenger Side)

Use method B for both passenger and driver side motor.

A. Motor spinning the shaft clockwise direction:


1) First, install one Posi-Tite® (12) onto white wire from the motor. See image on right.

2) Install second Posi-Tite® onto red with purple stripe wire from motor. See image on right.

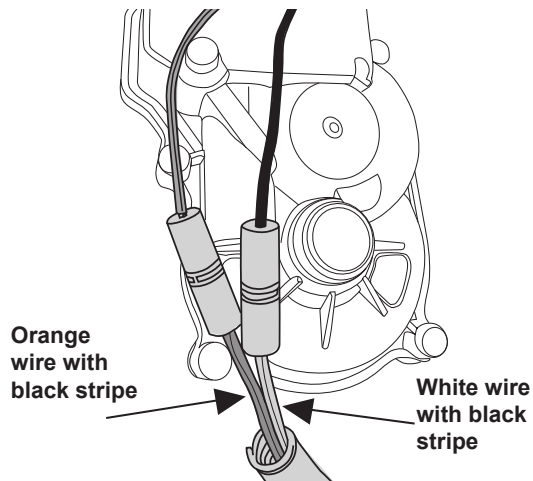

3) Next, connect the white wire with black stripe from the wire harness to the other end of the Posi-Tite® that is connected to the all white wire from first step above.

4) Connect the Posi-Tite® the orange wire from the motor with the orange with black stripe wire from the harness.

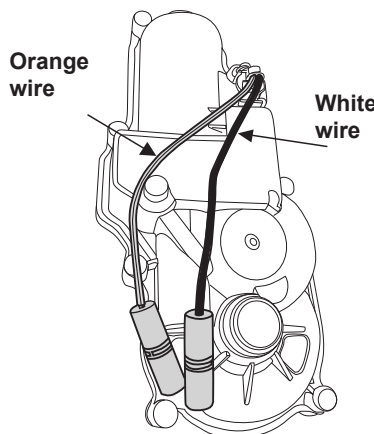

Posi-Tite® Instructions

1. Strip 3/8"


2. Push

3. Tighten

B. Motor spinning the shaft counter clockwise direction:


1) First, install one Posi-Tite® (12) onto white wire from the motor. See image on right.

2) Install second Posi-Tite® onto Orange wire from motor. See image on right.

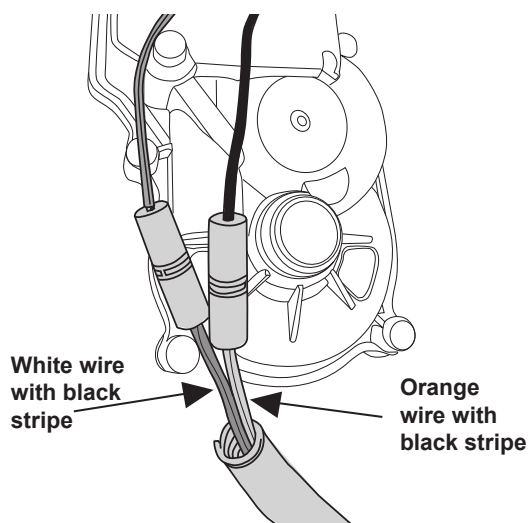

3) Next, connect the orange wire with black stripe from the wire harness to the other end of the Posi-Tite® that is connected to the all white wire from first step above.

4) Connect the Posi-Tite® the orange from the motor with the white with black stripe wire from the harness.

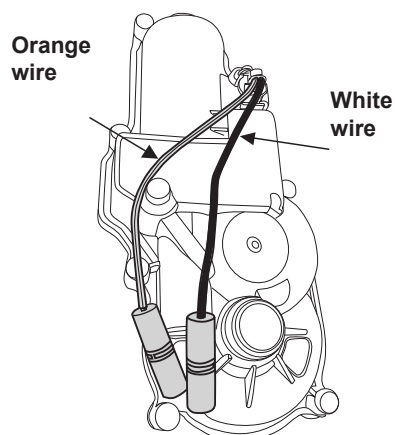


Posi-Tite® Instructions

1. Strip 3/8"

2. Push


3. Tighten

On each side of the vehicle measure from the front edge of door line on the pinch weld to the specified lengths below. Measure at 20" for front LED Light and 57" for rear LED Light.

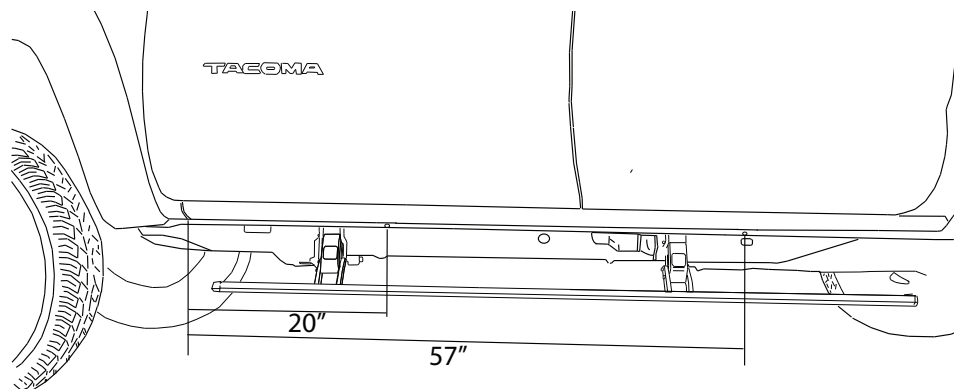


19

Drill a pilot hole followed by a 9/32" hole through the pinch weld at marked locations. Deburr all holes.

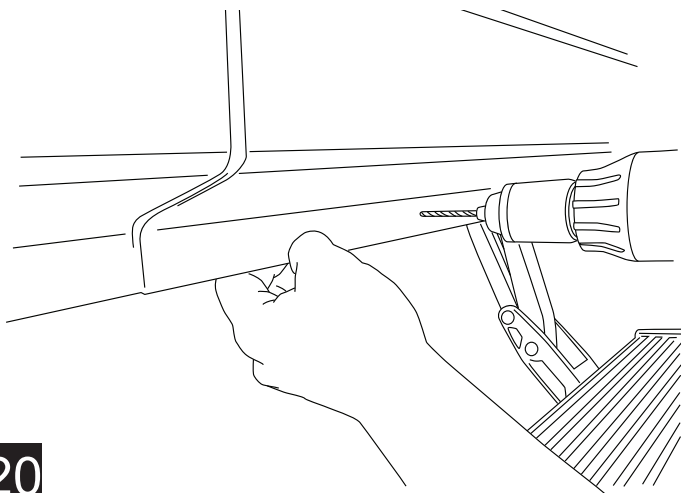


20

Insert grommet into drilled holes. Insert lamp wires through the grommets. (Silicon lube will help wires slip through grommets.)

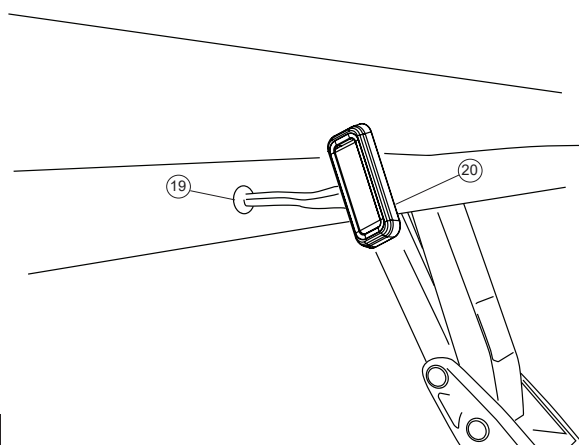


21

Affix lamp to rocker panel surface. Make sure lamp is affixed to a flat, clean surface.

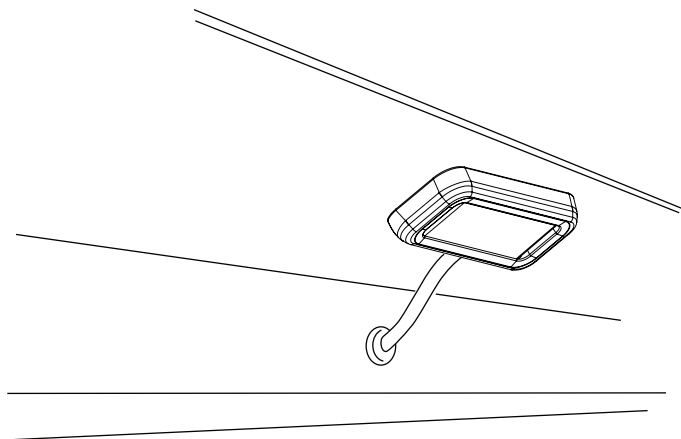


22

Using supplied butt connectors, connect the lamp wires. Red to Red, Black to Black. Once Crimped use heat gun to shrink tube.

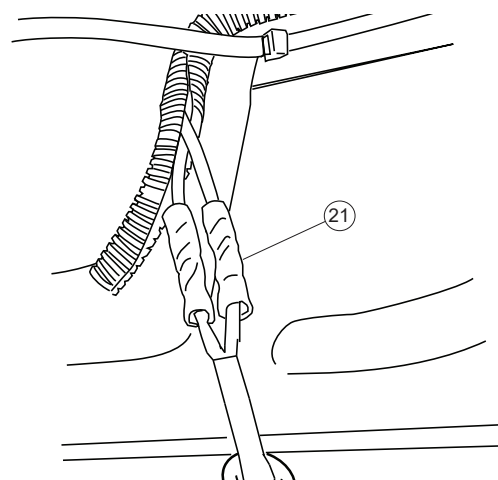


23

Close and wrap with conduit and electrical tape. Secure all loose wires with cable ties, with lamp wires pulled upward to avoid any wire snagging.

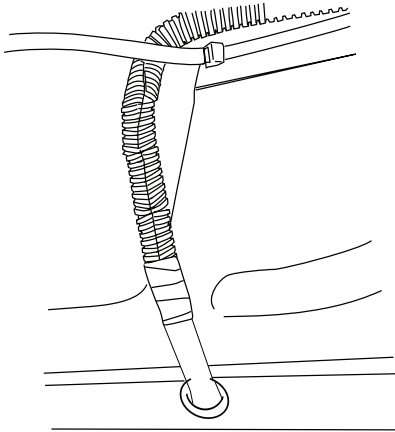


Reinstall fuse.

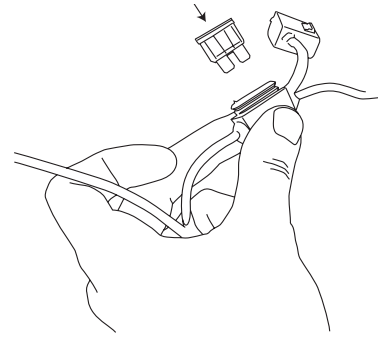

24

25

Check that all doors activate the Power Step and the LED Lights work when doors open and close. Reinstall any remaining trim panels.

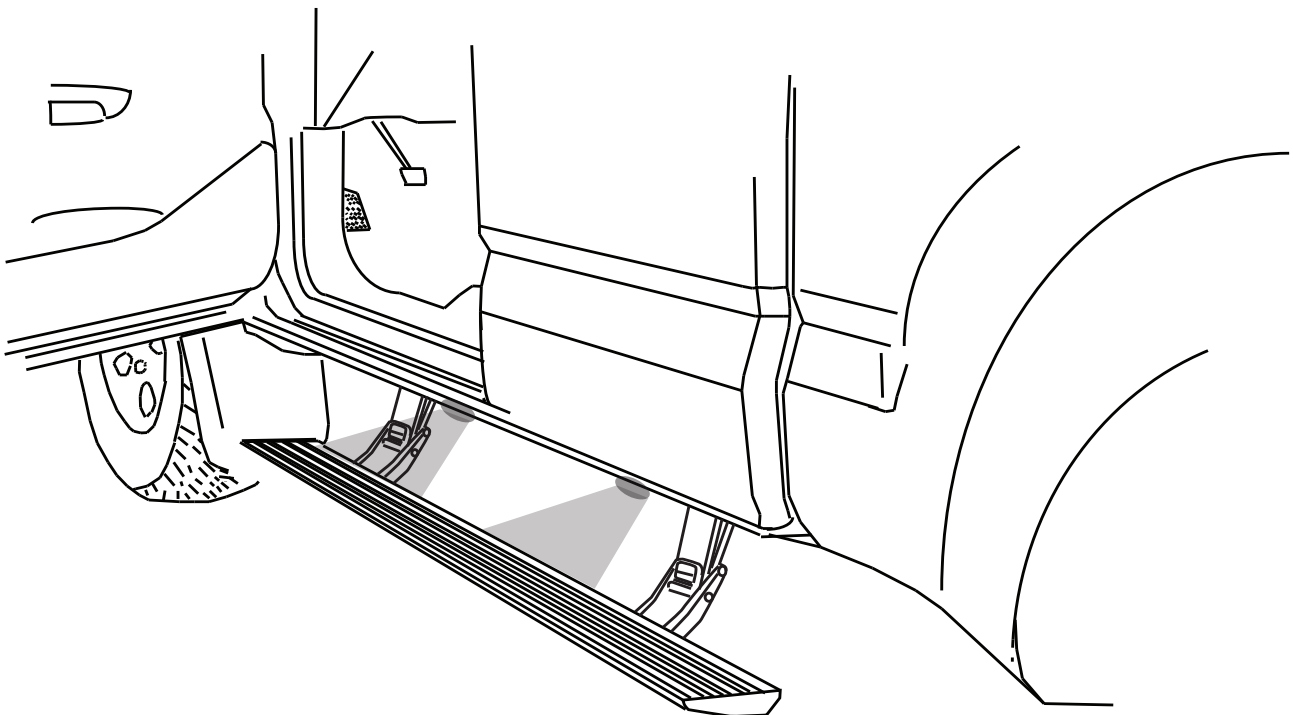

FINAL SYSTEM CHECK

Check that all doors activate the PowerStep and the LED lights work when doors open and close.

NORMAL OPERATION: When the doors open, PowerStep automatically deploys from under the vehicle. When the doors are closed, PowerStep will automatically return to the stowed/retracted position. **Note that there is a 2-second delay before the PowerStep returns to the stowed/retracted position.**

CORRECT OPERATION OF LIGHTS: All four lamps will illuminate upon opening any door of vehicle. Lamps will stay on until restowing of both Power Steps or until 5 minutes has expired with the doors open. When the lights timeout after 5 minutes, they can be reilluminated by closing and opening any door of vehicle.

26



AMERICAN DESIGNED & ENGINEERED

Thank you for your recent RealTruck purchase.

REGISTER YOUR PRODUCT TODAY FOR FASTER SERVICE & PRODUCT UPDATES

Please visit:

<https://realtruck.com/warranty-registration/>
or scan the QR Code



Product Registration Benefits:

- Ensure we have your purchase receipt and product info in our system which is required for warranty.
- Faster and easier access to customer service and tech support in the unlikely event you need warranty or product support.
- Registration helps us keep you up to date on product information and offers.


To view other RealTruck products that may be offered for your vehicle.

Please visit: www.realtruck.com

Rev 05.30.24

Congratulations on your purchase of the genuine RealTruck / AMP Research PowerStep! Here's what you should know...

POWER-DEPLOYABLE RUNNING BOARDS OPERATION: RealTruck / AMP Research PowerStep running boards automatically move when the doors are opened to assist entering and exiting the vehicle.



Automatic power deploy:

The running boards will extend down and out when the doors are opened.

Automatic power stow:

The running boards will return to the stowed position when the doors are closed. There will be a 2-second delay before the running boards move to the stowed position.


Automatic stop:

If an object is in the way of the moving running board, the running board will automatically stop. To reset, clear any obstruction, then simply open and close the door to resume normal operation.



Manually set in the deployed (OUT) position for access to the roof:

The running boards can be manually set in the deployed position by firmly holding the step down with your foot while at the same time closing the door. To resume normal operation, open and close the door.



Maintenance: In adverse conditions, debris such as mud, dirt, and salt may become trapped in the running board mechanism, possibly leading to unwanted noise. If this occurs, manually set the running boards to the deployed position and flush the front and rear hinge arms with a high-pressure car wash wand. Avoid spraying the motors directly. After washing, apply silicone spray lubricant to the hinge pivot pins. Do not apply silicone, wax or protectants like Armor All® to the running board stepping surface.

Caution! Keep hands away when the running board is in motion.

5-YEAR LIMITED WARRANTY

RealTruck / AMP RESEARCH warrants this product to be free from defects in material and workmanship for FIVE (5) YEARS FROM DATE OF PURCHASE, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair replacement of the product itself, or the repair or replacement of any component part thereof, found by the factory to be defective within the time period specified. The decision to repair or replace is wholly within the discretion of the manufacturer.

This warranty specifically excludes labor. If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, acts by nature or by defective parts not manufactured by us, is not covered under this warranty.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

FOR WARRANTY ISSUES WITH THIS PRODUCT PLEASE CALL REALTRUCK TECH SUPPORT 1-888-983-2204

WARNING

Be sure to read and precisely follow the provided instructions when installing this product. Failure to do so could place the vehicle occupants in a potentially dangerous situation. After installing or reinstalling, re-check to insure that the product is properly installed.



The material that your product is made from can be recycled.
Please also consider recycling the packaging that your product came in.

